JVC - 02112

JVC

SERVICE MANUAL

6" PORTABLE COLOR TV

MODEL CX-60ME

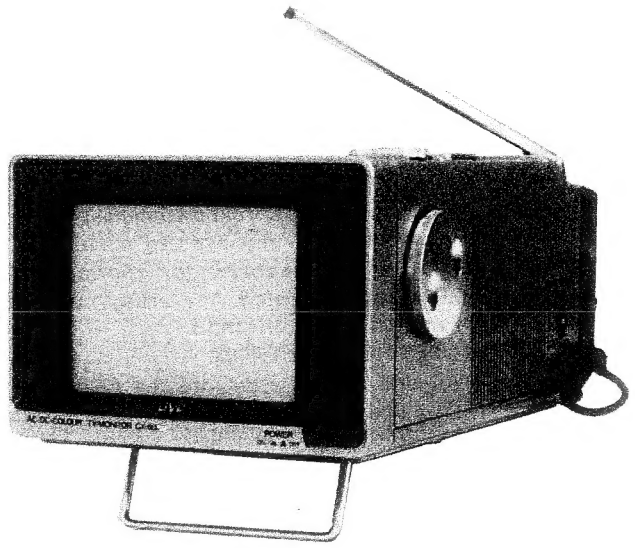

CONTENTS

1. SAFETY PRECAUTION 2
2. FEATURES 3
3. OUTLINE 3
   (Block Diagram) 3
4. FUNCTIONS 4
5. HOW TO REMOVE FOR SERVICE 5
6. SERVICE ADJUSTMENT . . . . . 6 ~ 8
7. REPLACEMENT PARTS LIST . . . . . 9 ~ 15
   (Packing Diagram) 11
   (Exploded View) . . . . . 13 ~ 15
8. AC POWER ADAPTOR (AA-60ME) . . . . . 16 ~ 17
9. OPTIONAL ACCESSORIES (CB-60E) . . . . . 18 ~ 22
   (CB-60E SCHEMATIC DIAGRAM) 21
   * With SCHEMATIC DIAGRAM . . . . . ① ~ ⑥

OPTIONAL ACCESSORIES

CB-60E . . . . . **Rechargeable Battery**

AP-23 . . . . . **Auto Plug**

SPECIFICATIONS

Dimension & Weight : Described on page 12.

TV System & Colour System
VHF/UHF . . . . . CCIR(B,D,G,K,K1,I), PAL/SECAM

TV Receiving Channel & Frequency
V_L Band . . . . . 47 MHz ~ 68 MHz
V_H Band . . . . . 174 MHz ~ 230 MHz
UHF Band . . . . . 470 MHz ~ 862 MHz

Intermediate Frequency
Video IF Carrier . . . . . 38.9 MHz
Sound IF Carrier . . . . 33.4 MHz (5.5 MHz), 32.9 MHz
: .(6 MHz) or 32.4 (6.5 MHz) selectable
Colour Sub Carrier . . . . . PAL : 4.43 MHz
: . . SECAM : 4.25 MHz, 4.40625 MHz
ANT. . . . . Built-in rod antenna for VHF and UHF
ANT. Input Impedance . . . . 75Ω, AERIAL (VHF/UHF)
Power Input . . • 100 V ~ 260 V AC, 50 Hz/60 Hz
• DC12V Car battery
with auto plug (Model AP-23) option.
• DC12V rechargeable battery
(Model CB-60E) option.

Power Consumption . . . . . 0.16A (when 240V AC)
: . . 1.30A (max.), 15W (avg.) : (when 12V DC)
Picture Tube . . . . . 6", 55 degrees deflection,
In-line gun dot screen
Viewable Picture Size . . . . . (W) 10.4 cm x (H) 7.9 cm
High Voltage . . . . . 14 kV ± 1 kV (at Zero beam current)
Speaker . . . . . 8 cm round type, 16 Ω
Audio Power Output 0.6W
Video External Input . . . . . 1 Vp-p, 75 Ω
Audio External Input . . . . . 390 mVrms (−6 dBs),
high impedance
Video TV Output . . . . . 1 Vp-p, 75 Ω
Audio TV Output . . . . . 150 m Vrms (−14 dBs)
low impedance
(400Hz, 50% Mod.)
Tube 1
IC 7
Transistor 32

(Design and specifications subject to change without notice)

No. 5513
Mar. 1984

2112

1. SAFETY PRECAUTION

1. The design of this product contains special hardware, many circuits and components specially for safety purposes.
   For continued protection, no changes should be made to the original design unless authorized in writing by the manufacturer. Replacement parts must be identical to those used in the original circuits. Service should be performed by qualified personnel only.
2. Alterations of the design or circuitry of receiver should not be made. Any design alterations or additions will void the manufacturer's warranty and will further relieve the manufacturer of responsibility for personal injury or property damage resulting therefrom.
3. Many electrical and mechanical parts in television sets have special safety-related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in the parts list of Service manual. **Electrical components having such features are identified by shading on the schematics and by (⚠) on the parts list in Service manual.** The use of a substitute replacement which does not have the same safety characteristics as the recommended replacement part shown in the parts list in Service manual may create shock, fire, or other hazards.
4. If any repair has been made to the chassis, it is recommended that the B_1 setting should be checked or adjusted (See ADJUSTMENT OF POWER SUPPLY).
5. The high voltage applied to the picture tube must conform with that specified in Service manual. Excessive high voltage can cause an increase in X-Ray emission, arcing and possible component damage, therefore operation under excessive high voltage conditions should be kept to a minimum, or should be prevented. If severe arcing occurs, remove the AC power immediately and determine the cause by visual inspection (incorrect installation, cracked or melted high voltage harness, poor soldering, etc.). To maintain the proper minimum level of soft X-Ray emission, components in the high voltage circuitry including the picture tube must be the exact replacements or alternatives approvided by the manufacturer of the complete product.
6. Do not check high voltage by drawing an arc. Use a high voltage meter or a high voltage probe with a VTVM. Discharge the picture tube before attempting meter connection, by connecting a clip lead to the ground frame and connecting the other end of the lead through a 10kΩ 2W resistor to the anode button.
7. When service is required, observe the original lead dress. Extra precaution should be given to assure correct lead dress in the high voltage circuit area. Where a short circuit has occurred, those components that indicate evidence of overheating should be replaced. Always use the manufacturer's replacement components.
8. ISOLATION CHECK
   (SAFETY FOR ELECTRICAL SHOCK HAZARD)
   After re-assembling the product, always perform an isolation check on the exposed metal parts of the cabinet (antenna terminals, channel selector knobs, metal cabinet, screwheads, earphone jack, control shafts, etc.) to be sure the product is safe to operate without danger of electrical shock.
   (1) DIELECTRIC STRENGTH TEST
   The isolation between the AC primary circuit and all metal parts exposed to the user, particularly any exposed metal part having a return path to the chassis should withstand a voltage of 3,000V AC (r.m.s.) for a period of one second.
   (. . . . . withstand a voltage of 1,100V AC (r.m.s.) to an appliance rated up to 120V, and 3,000V AC (r.m.s.) to an appliance rated 200V or more, for a period of one second.
   This method of test requires a test equipment not generally found in the service trade.
   (2) LEAKAGE CURRENT CHECK
   Plug the AC line cord directly into the AC outlet (do not use a line isolation transformer during this check.) Using a "Leakage Current Tester", measure the leakage current from each exposed metal part of the cabinet, particularly any exposed metal part having a return path to the chassis, to a known good earth ground (water pipe, etc.). Any leakage current must not exceed 0.5mA AC (r.m.s.).
   • ALTERNATE CHECK METHOD
   Plug the AC line cord directly into the AC outlet (do not use a line isolation transformer during this check.). Use an AC voltmeter having 1,000 ohms per volt or more sensitivity in the following manner. Connect a 1500Ω 10W resistor paralleled by a 0.15μF AC-type capacitor between an exposed metal part and a known good earth ground (water pipe, etc.).
   Measure the AC voltage across the resistor with the AC voltmeter.
   Move the resistor connection to each exposed metal part, particularly any exposed metal part having a return path to the chassis, and measure the AC voltage across the resistor. Now, reverse the plug in the AC outlet and repeat each measurement. Any voltage measured must not exceed 0.35V AC (r.m.s.). This corresponds to 0.5mA AC (r.m.s.).

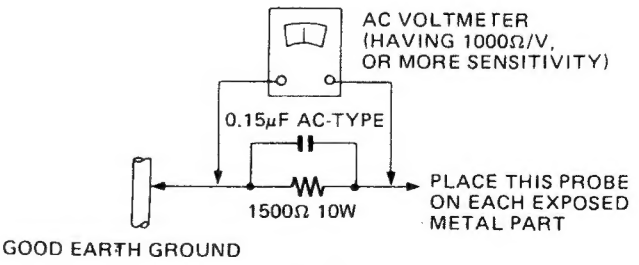

Fig. 1-1

2. FEATURES

- Copes with PAL/SECAM colour systems.
- 3 way power supply systems of AC Power/Car Battery/Rechargeable Battery.
- Adopts detachable AC adaptor.
- With A/V INPUT terminal and TV-OUT (A/V) terminal.
- With a carrying handle and a stand.
- With a rod antenna and an external ANT. terminal.
- Copes with broad-range input power by adopting switching regulator circuit.

3. OUTLINE

■ AUTOMATIC SWITCHING OF PAL/SECAM

1. When the PAL signal is input, the SECAM colour demodulation circuit does not operate; the SECAM killer circuit and the PAL circuit do. Similarly, when the SECAM signal is input, the PAL killer circuit and the SECAM circuit operate, but the PAL colour demodulation circuit does not.
2. A system for switching either the PAL or SECAM signal is built in the SECAM IC, which is operated by the killer voltage of the SECAM circuit described later.
3. The killer voltage gates the burst signal (SECAM uses a 4.25 MHz non-modulated carrier signal) at the back porch, a killer voltage based on the gated signal.

■ MANUAL SWITCHING OF SYSTEM

When the system switch is set to SECAM, the PAL killer circuit and the SECAM circuit operate, but the PAL colour demodulation circuit does not operate.

(BLOCK DIAGRAM)

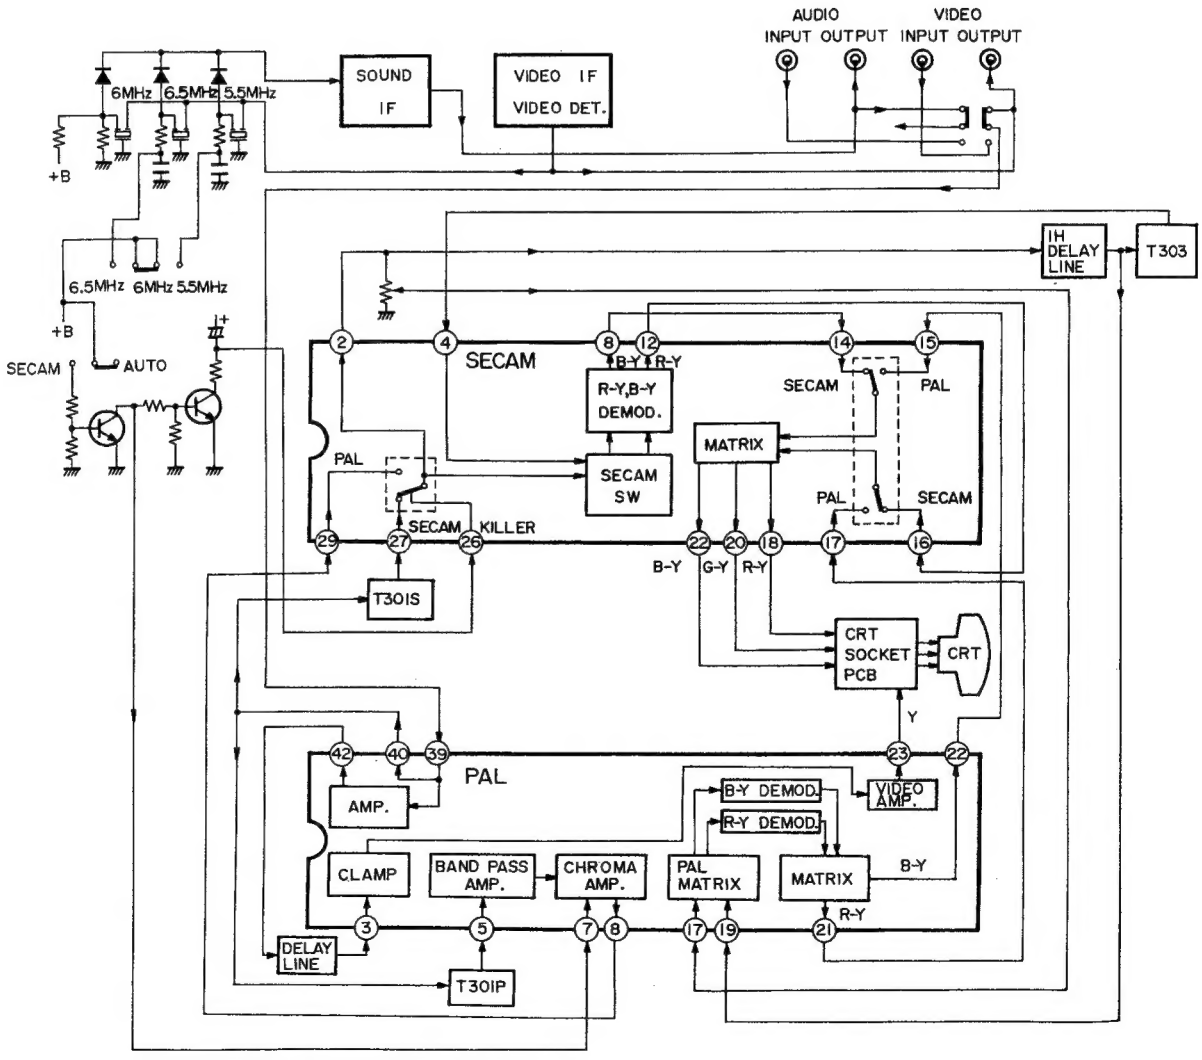

4. FUNCTIONS

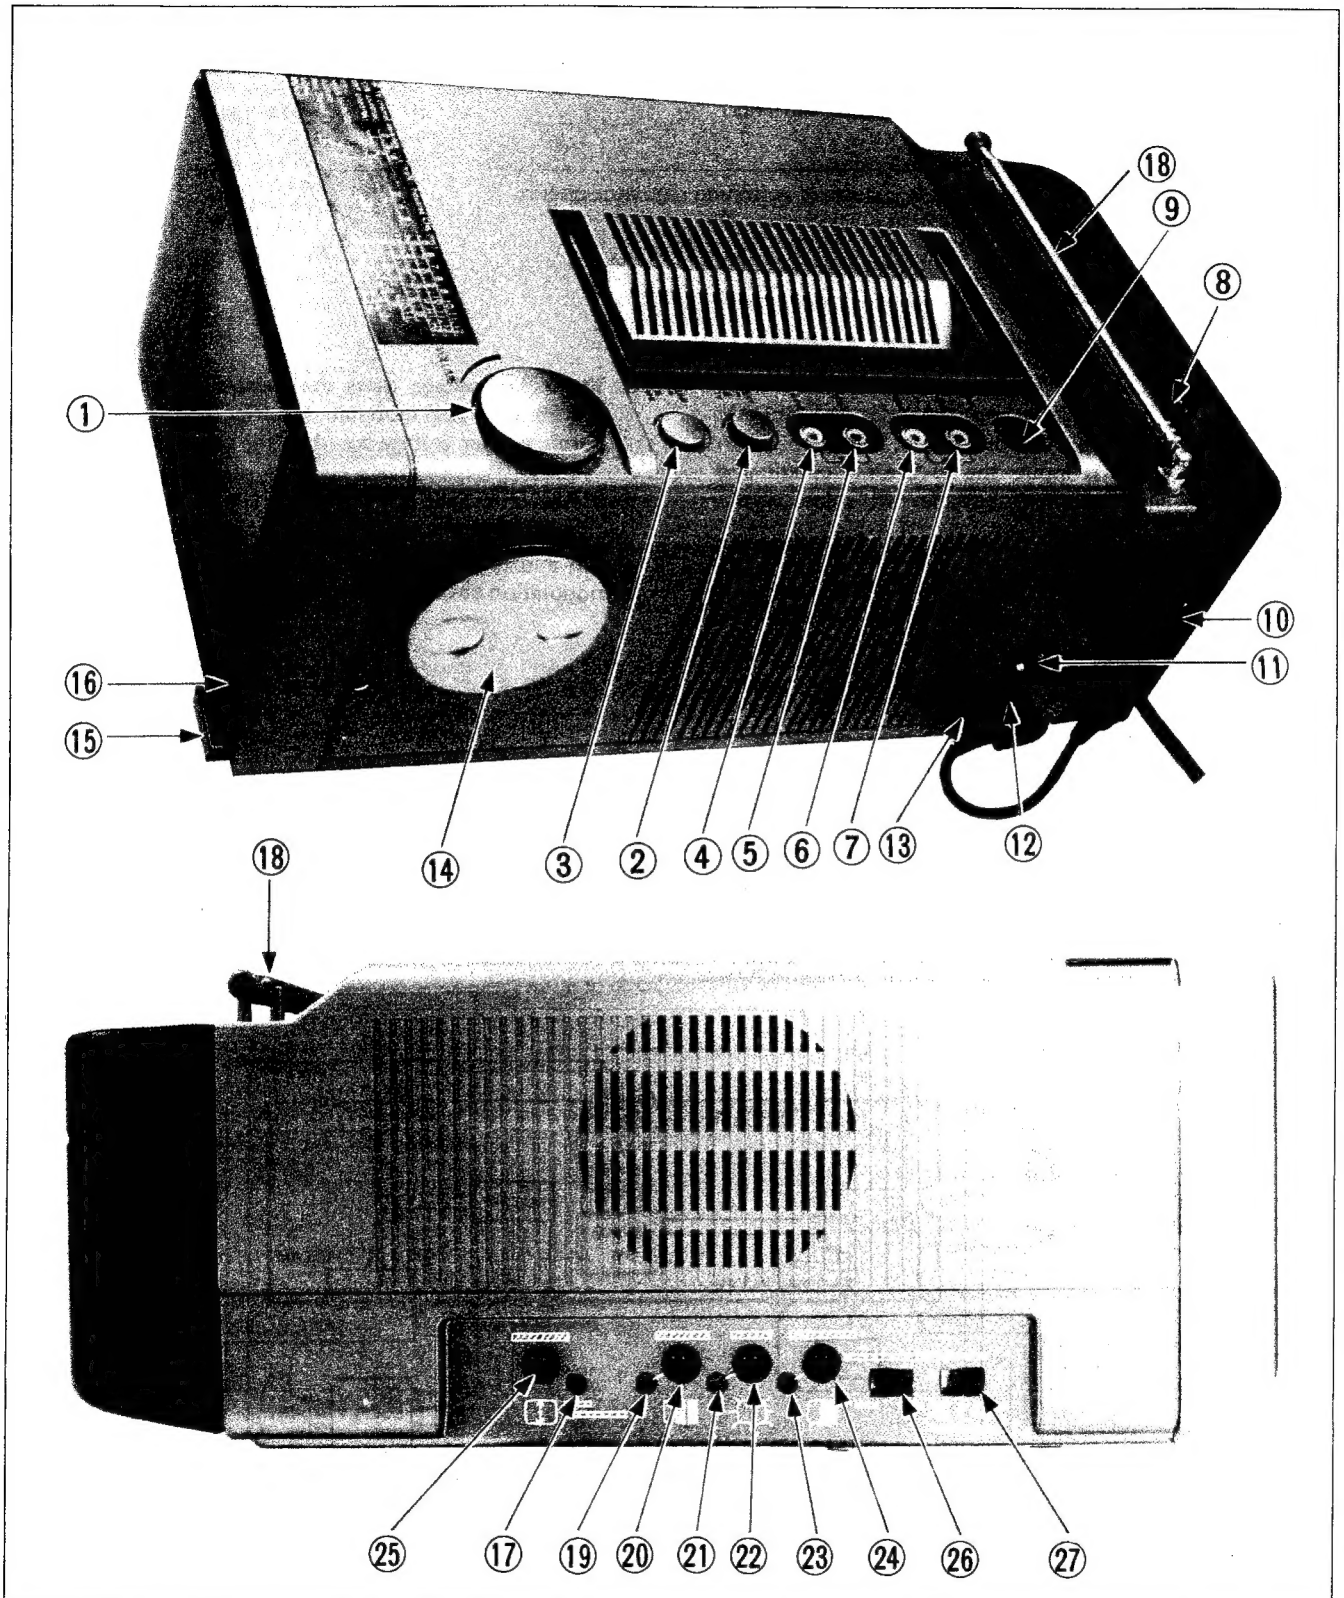

① VOLUME	⑦ VIDEO TV OUTPUT	⑬ AFC	⑱ ROD ANT.	㉔ PICTURE
② TV ↔ EXT.	⑧ MAIN POWER IND.	⑭ TUNING	⑲ SUB COLOUR	㉕ V. HOLD
③ UHF ↔ VHF	⑨ EARPHONE	⑮ POWER SW.	⑳ COLOUR	㉖ COLOUR SYSTEM
④ AUDIO EXT. INPUT	⑩ MAIN POWER SW.	⑯ POWER IND.	㉑ SUB BRIGHT	㉗ TV SOUND
⑤ VIDEO EXT. INPUT	⑪ EXT. ANT. TERM.	⑰ PAL SUB COLOUR	㉒ BRIGHT	
⑥ AUDIO TV OUTPUT	⑫ DC 12V IN		㉓ SUB CONTRAST	

5. HOW TO REMOVE FOR SERVICE

TOP CABINET REMOVAL

1. Pullout the TUNING KNOB and the VOLUME KNOB.
2. Remove the two screws (A) in Fig. 5-1 and the one screw (B), and then rod antenna.
3. The top cabinet is demountable by lifting it upward while pressing the locked points (C) [Fig. 5-1, Fig. 5-2].

BOTTOM COVER REMOVAL

1. Remove the one screw (A) in Fig. 5-3.
2. Pressing the locks points (B) and (C) in Fig. 5-3 & Fig. 5-4 and then remove the P.C. board from the bottom cover.
3. Draw the bottom cover to the arrow direction (E) while pressing the locked points (D) in Fig. 5-4.

* When removing the P.C. board, take care because UNF resistor touches CRT socket P.C. board.

DIAL BELT REMOVAL

1. Pullout the roller (A) in Fig. 5-5, and the dial belt is demountable or replaceable.

WIRE CLAMPING AND TYING BAND

1. Be sure to clamp the wire.
2. Never remove the tying band used for wire clamping. Should it be inadvertently removed, be sure to clamp the wire again, using insulating material.

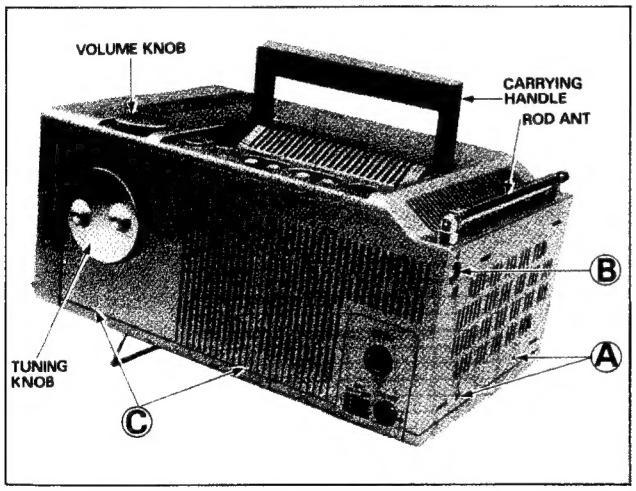

Fig. 5-1

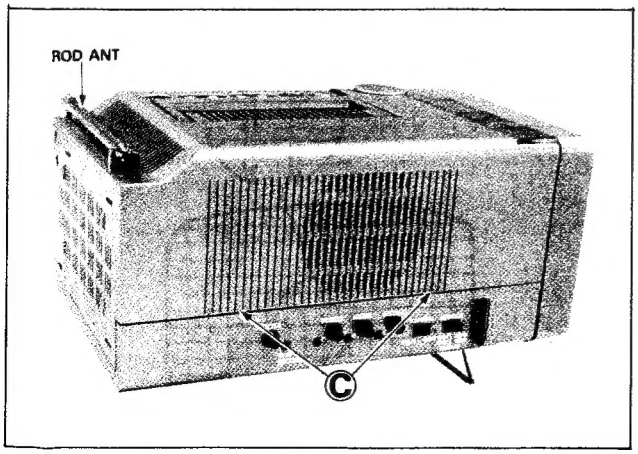

Fig. 5-2

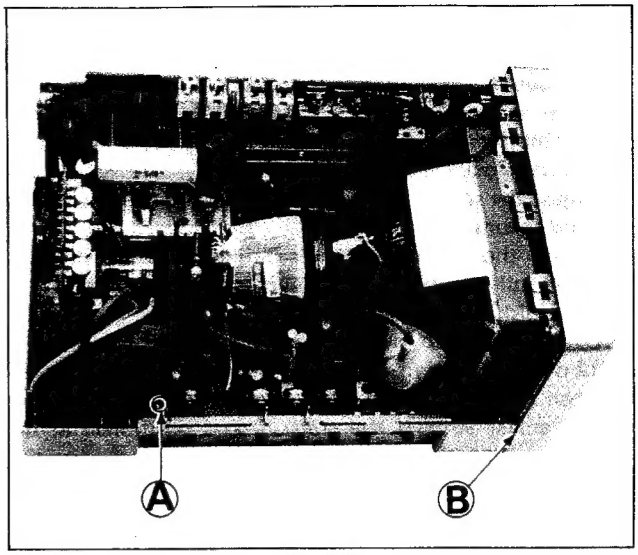

Fig. 5-3

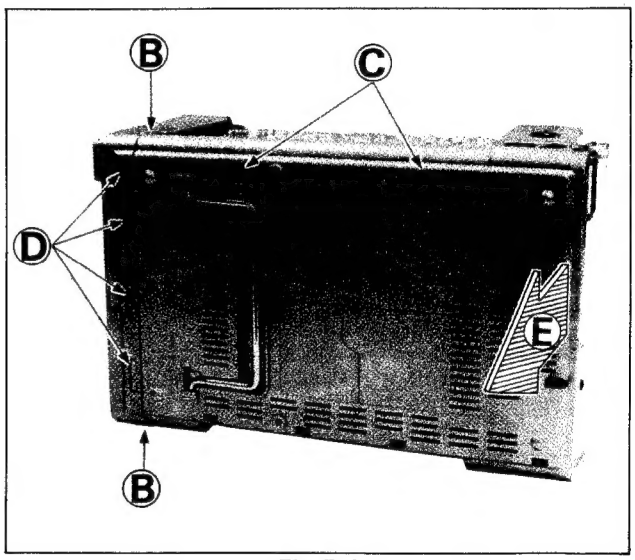

Fig. 5-4

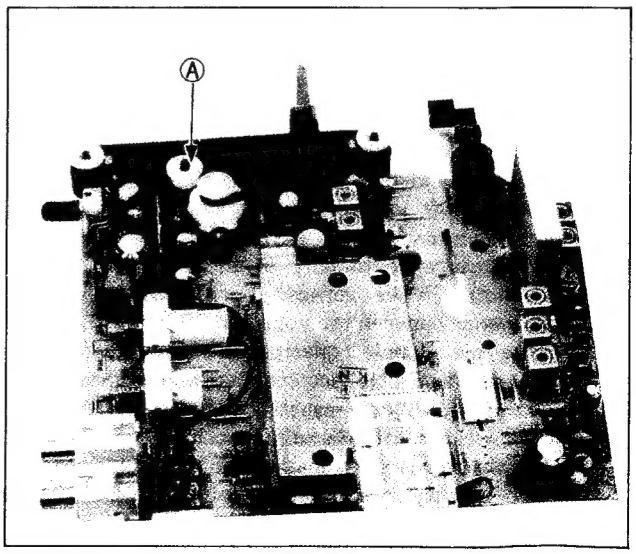

Fig. 5-5

6. SERVICE ADJUSTMENTS

PURITY

1. Display a monochrome pattern.
2. As viewed from the back (See Fig. 6-1), turn the magnet lock counter-clockwise to loosen it.
3. Turn the green cutoff VR (R711) fully clockwise and the red and blue cutoff VRs (R712, R710) fully counter-clockwise. (Fig. 6-3)
   Adjust the screen VR (Fig. 6-3) so that the vertical green band becomes easy to see.
4. Loosen the deflection yoke securing screw and slide the yoke fully rearward to obtain colour shading in the green disk. (Fig. 6-2)
5. Overlap the two purity magnet tabs and set them to 12 o'clock position.
6. Open and close the two purity magnets (scissor fashion) and adjust so that the green disk is positioned at the center of the picture. (Fig. 6-2)
   If green disk is not obtained, adjust for uniform overall coloration.
7. Slide the deflection yoke forward and adjust its position so that the green colour completely fills the picture area.
8. Confirm that uniform overall rasters of both red and blue single colour rasters can also be obtained in the same manner.
9. Secure the deflection yoke retaining screw moderately so that the deflection yoke does not move back and forth.

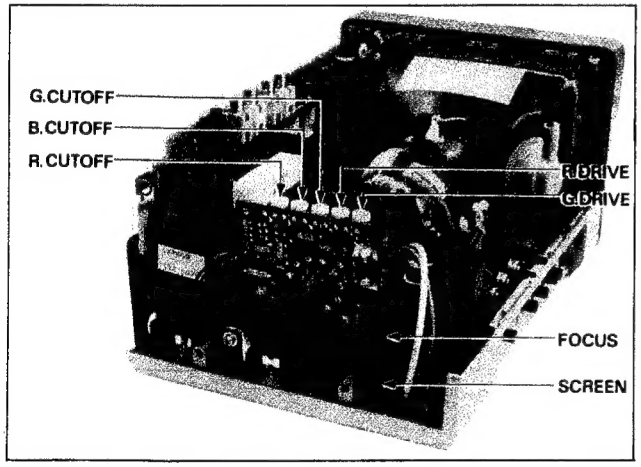

Fig. 6-3

STATIC CONVERGENCE (CENTER)

1. Employ a crosshatch pattern and adjust the brightness so that the image is clear, but slightly darkened.
2. Turn the red and blue cutoff VRs fully clockwise and the green cutoff VR fully counter-clockwise (Fig. 6-3). Adjust the screen VR (Fig. 6-3) for an easily seen image.
3. Adjust convergence roughly in the corner by tilting the deflection yoke vertically or horizontally, then insert a wedge between the yoke and CRT on top.(Fig.6-7)
4. Turn the two 4 pole convergence magnets and adjust so that red and blue become overlapped throughout the picture area to yield magenta. (Fig. 6-5)
5. Turn the green cutoff VR fully clockwise and adjust the two 6 pole convergence magnets so that the green and magenta become overlapped throughout the picture area to yield white. (Fig. 6-4)
6. Repeat steps 4 and 5.

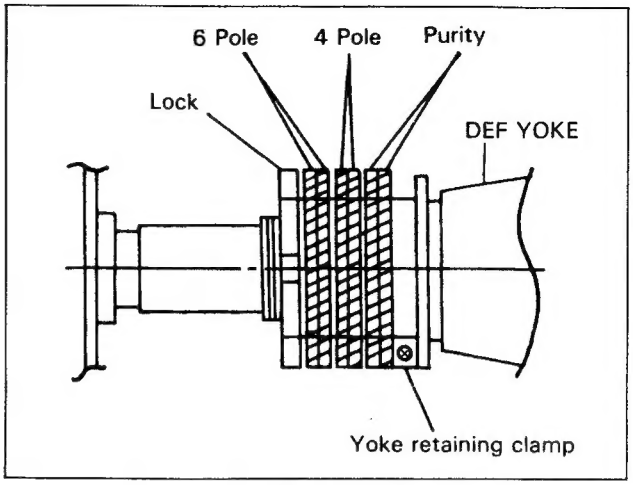

Fig. 6-1

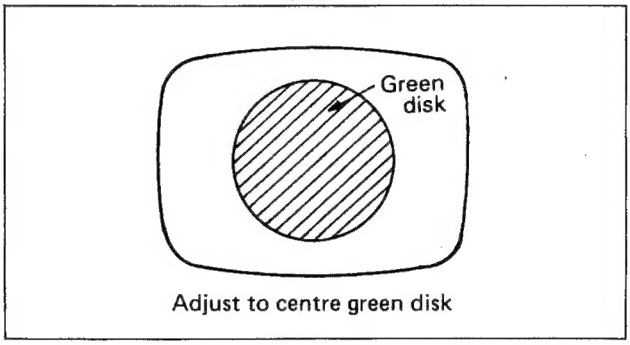

Fig. 6-2

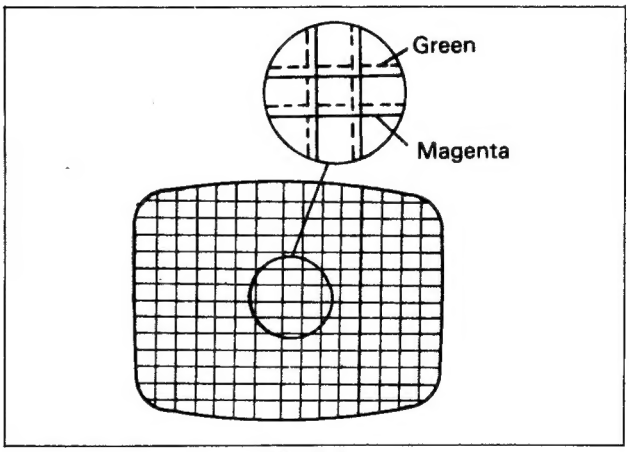

Fig. 6-4

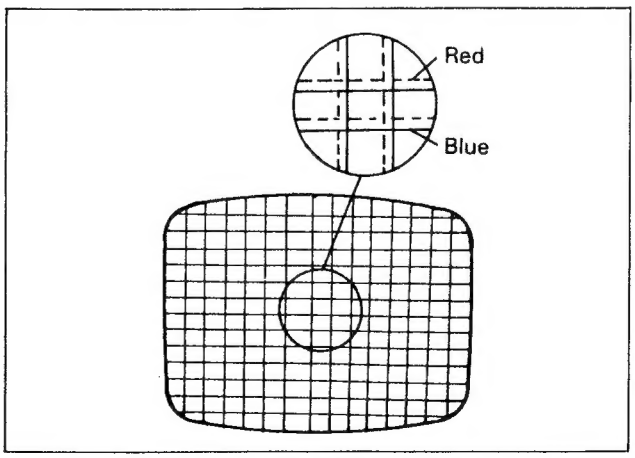

Fig. 6-5

DYNAMIC CONVERGENCE (CORNER)

1. Remove the wedge.
2. Adjust convergence as shown in Fig. 6-6 by tilting the yoke up and down, then insert the wedges on top and bottom. (Fig. 6-7)
3. Apply (modeler's) glue on the wedges and magnets to fix.(Fig. 6-7)
4. Tighten the screw of the deflection yoke.
5. Turn the magnet lock and tighten securely.

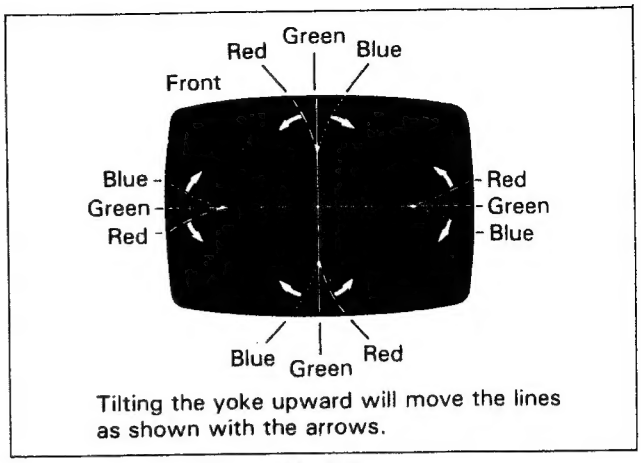

Tilting the yoke upward will move the lines as shown with the arrows.

Fig. 6-6

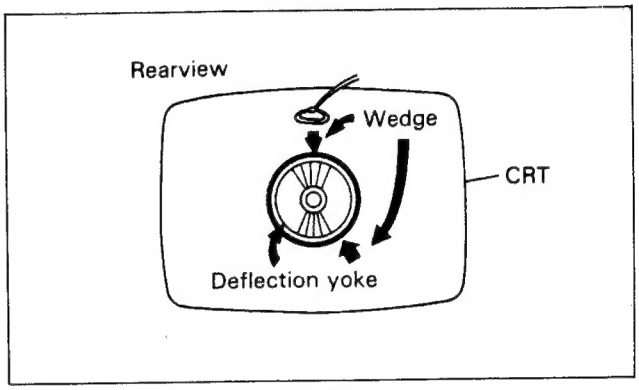

Fig. 6-7

POWER SUPPLY

■ AC ADAPTER OUTPUT VOLTAGE

1. Connect AC power adapter to a TV body and receive a broadcast.
2. Adjust OUTPUT VOLTAGE ADJ. VR (within power adapter PB Ass'y) so that the adapter output voltage becomes 12.5V.
   * Be aware that there are both the earth of primary side and the earth of secondary side. In case of output voltage adjustment, use the earth of secondary side.

■ B1 VOLTAGE (11.0V)

1. Connect AC power adapter and receive a broadcast.
2. Adjust 11.0V ADJ. VR so that the voltage between Q901 collector and the earth becomes 11.0V.

SUB TUNING DIAL

*** Turn off the AFC switch.**

1. V_L CHANNEL

1) While rotating the TV tuning knob, set the dial needle to that channel number of the low band TV station which is smallest among those receivable.
2) Adjust the V_L SUB TUNING VR and receive a TV program from the station whose channel number is set on the dial needle.
3) By attempting to receive other stations within the band, confirm that the pointer corresponds to the channel number of each station.

2. V_H CHANNEL

1) While rotating the TV tuning knob, set the dial needle to that channel number of the high band TV station which is smallest among those receivable. Adjust the V_{HL} SUB TUNING VR and receive a TV program from the station whose channel number is set on the dial needle.
2) While rotating the TV tuning knob, set the dial needle to that channel number of the high band TV station which is largest among those receivable. Adjust the V_{HH} SUB TUNING VR and receive a TV program from the station whose channel number is set on the dial needle.
3) Repeat steps (1) and (2) and confirm that the pointer corresponds to the channel number of each station.

3. UHF CHANNEL

1) After changing over the TV band selector to UHF position, adjust the UHF SUB TUNING VR in the same manner as "V_H ADJUSTMENT". However, adjust the U_L SUB TUNING VR in the case of the smallest channel number of TV station and the U_H SUB TUNING VR in the case of the largest channel number of TV station.

4. Turn on the AFC switch.

HORIZONTAL OSCILLATOR

1. Set the H. HOLD VR to the mechanical center position.
2. Connect the jumper clip between TP-33 and earth.
3. Adjust the H. HOLD VR until picture is in view and locks or drifts slowly back and forth.
4. Remove the jumper clip.
5. Make sure that the set maintains horizontal sync when channels are switched.

FOCUS
Adjust FOCUS VR for best overall definition and picture detail at normal brightness and contrast.

NOISE (RF A.G.C. Delay)
This control is set at the factory and rarely requires any adjustment. If a snowy picture appears on a medium to weak station, adjust the NOISE VR.
1. Turn NOISE VR fully counter-clockwise, maximum noise in picture.
2. Slowly turn NOISE VR clockwise until snow or noise in picture just disappears.
   Note: Check operation on strong channels. If overloading occurs (bending, poor colour, loss of colour sync. etc.) make compromise adjustment.

VERTICAL HEIGHT
Adjust the V. HEIGHT VR to obtain the optimum size of vertical height.

SUB BRIGHT AND SUB CONTRAST
1. Set the BRIGHT and PICTURE VR knobs to central position respectively.
2. Adjust the SUB BRIGHT VR and the SUB CONTRAST VR until an ideal picture is obtained.

SUB COLOUR
1. Receive a SECAM colour signal.
2. Adjust the COLOUR VR knob to obtain natural colour density.
3. Adjust the SUB COLOUR VR until natural colour density is obtained.
4. Receive a PAL colour signal.
5. Adjust the PAL SUB COLOUR VR until natural colour density is obtained.

CHROMA CIRCUIT
■ PAL
DL-MATRIX
1. Receive a PAL colour bar signal.
2. Connect an oscilloscope to ⑩ pin of IC201 through C307.
3. Adjust T302P for the maximize waveform (Burst signal).
4. Set the oscilloscope at the X-Y mode and connect channel 1 (X axis) to ⑰ pin of IC301 and channel 2 (Y axis) to ⑮ pin of IC301 respectively.
5. Short TP-43A and TP-43B with a jump wire.
6. Supply bias to TP-40 through 10 kΩ resistor from 12V DC.
7. Adjust DL AMP. VR so that the figure becomes (B) from (A).
8. Adjust DL P. TRANSF (T303) so that the figure becomes (C) from (B).
9. While observing the screen, adjust colour synchronization by manipulating the C312 (4.43 MHz OSC).

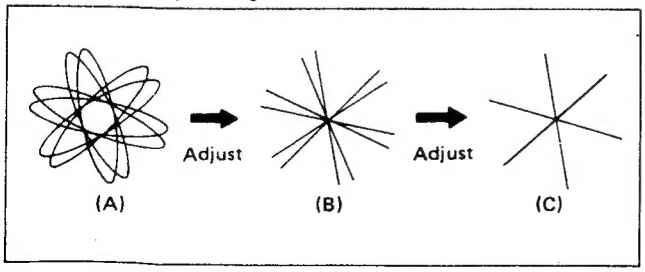

Fig. 6-8

■ SECAM
* Do the SECAM adjustment before the PAL adjustment.
1. Receive a SECAM colour bar signal.
2. Connect an oscilloscope to ㉗ pin of IC301.
3. Adjust BELL TRANSF. (T301S) for the flat waveform as shown in Fig. 6-9-(B).
4. Connect a digital voltmeter to pin ㉖ of IC301.
5. Adjust IDENT TRANSF (T302S) for the maximum DC ovltage.
6. Adjust DISCRI. TRANSF. (T304) and DISCRI. TRANSF. (T305) until colours are eliminated from the black-and-white sections of the colour bars.

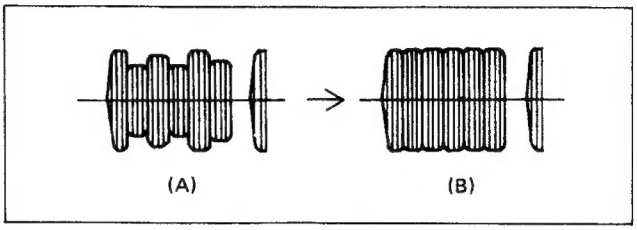

Fig. 6-9

HORIZONTAL WIDTH
Adjust H. WIDTH control coil by turning it with a hexagonal adjusting bar only if RIGHT and LEFT sides of pictures can't be seen.

V. IF CIRCUIT
1. Connect a color bar generator to antenna terminal. (When the signal is too strong, use the attenuator.)
2. Connect DC voltmeter (or tester) between AGC terminal of E. Tuner and earth.
3. Rotate "Noise" volume (R109) so that RF. AGC voltage becomes DC 4.5V ± 1V.
4. Adjust CW Transformer so that the indicator becomes to minimum.
5. Confirm the adjustment of "Noise".

RF. AFC
1. Connect a colour bar generator to antenna terminal.
2. Adjust AFC Transformer so that the voltage of TP-16 becomes DC 6.5V ± 0.1V. (Confirm to swing between about 9V and 4V previously.)

S. IF CIRCUIT
1. Tune in a local station preferably a program with the continuous audio.
2. Adjust T601 and T602 so that the sound becomes to maximum without distortion.

■ REFERENCE DATA

REFERENCE DATA
Receiving VHF TV channels (All UHF TV CHs; common) / * Mark; Receiving CHs limited

CCIR countries	2 3 4		5 6 7 8 9 10 11 12
OIRT countries	1 2	3 4 5	6 7 8 9 10 11 12
Itary	A B	C	D E F G H H1 H2
French territories			4 5 6 7 8 9
* Australia	1 2	3 4	6 7 8 9 10 11
* New Zealand	2 3		4 5 6 7 8 9
* Ireland	B C		D E F G H J
* Morocco			6 7 8 9 10

7. REPLACEMENT PARTS LIST

PRODUCT SAFETY NOTE
Components identified by the ⚠ symbol in the PARTS LIST and the shaded areas on the Schematic have special characteristics important to safety. Before replacing any of these components, read carefully the **SAFETY PRECAUTION** on Page 2 of this Service Manual.
DO NOT degrade the safety of the set through improper servicing.

1. ABBREVIATED WORDS OF RESISTORS AND CAPACITORS

RESISTORS

C R	:	Carbon Resistor
Comp. R	:	Composition Resistor
OM R	:	Oxide Metal Film Resistor
V R	:	Variable Resistor
MF R	:	Metal Film Resistor
F R	:	Fusible Resistor
UNF R	:	Unflammable resistor

CAPACITORS

C Cap.	:	Ceramic Capacitor
M Cap.	:	Mylar Capacitor
E Cap.	:	Electrolytic Capacitor
BP E Cap.	:	Bi-Polar (or Non-Polar) Electrolytic Capacitor
MM Cap.	:	Metalized Mylar Capacitor
PP Cap.	:	Polypropylene Capacitor
MPP Cap.	:	Metalized PP Capacitor
PS Cap.	:	Polystyrol Capacitor
Tan. Cap.	:	Tantalum Capacitor

2. FOLLOWING RESISTORS AND CAPACITORS OF STANDARD ELECTRICAL COMPONENTS ARE OMITTED FROM THIS PARTS LIST. EACH PART NUMBER OF THESE STANDARD REPLACEMENT COMPONENTS IS DEFINED AS FOLLOWS.

Carbon Resistor (C R): Lead form (—⊂⊃—)

Rating	Part No.
¼W	QRD141J-□□□ (CR: ¼W; Tolerance; Lead form; Constant term)
½W	QRD121J-□□□
⅛W	QRD161J-□□□

Composition Resistor (Comp. R): Lead form (—⊂⊃—)

Rating	Part No.
½W	QRC121K-□□□ (Comp. R: ½W; Tolerance; Lead form; Constant term)

Mylar Capacitor (M Cap.): Lead form ( )

Withstand Voltage	Part No.
50V	QFM11HK-□□□ (M Cap.: Lead form; 50V; Tolerance; Constant term)
100V	QFM42AK-□□□
200V	QFM42DM-□□□

Ceramic Capacitor (C Cap.): Lead form ( )

Withstand Voltage	Parts No.
50V	QCS11HJ-□□□ (C Cap.: Lead form; 50V; Tolerance; Constant term)
500V	QCS12HJ-□□□

Electrolytic Capacitor (E Cap.): Lead form ( )

Withstand Voltage	Parts No.
6.3V	QET40JR-□□□ (E Cap.: Lead form; 6.3V; Tolerance; Constant term)
10V	QET41AR-□□□
16V	QET41CR-□□□
25V	QET41ER-□□□
50V	QET41HR-□□□

3. DECODING OF TOLERANCE AND CONSTANT TERM

TOLERANCE

J: ±5% K: ±10% M: ±20% N: ±30% H: $^{+50}_{-10}$% Z: $^{+80}_{-20}$% P: $^{+100}_{-0}$% R: $^{+30}_{-10}$%

CONSTANT TERM

• Carbon Resistor (¼W, ±5% Tolerance)

QRD141J-□□□
CONSTANT TERM.

-□□□	2.7Ω	→ QRD141J-2R7
1R0 → 1.0Ω	47kΩ	→ 47 x 10³ → QRD141J-473
9R7 → 9.7Ω		
10□ → 10□ means 10 x 10□ (Ω)		
82□ → 82□ means 82 x 10□ (Ω)		

• Ceramic Capacitor (50 Volts, ±5% Tolerance)

QCS11HJ-□□□
CONSTANT TERM.

-□□□	5pF	→ QCS11HJ-5R0
1R0 → 1.0pF	680pF	→ 68 x 10¹ → QCS11HJ-681
8R0 → 8.0pF	3300pF	→ 33 x 10² → QCS11HJ-332
10□ → 10□ means 10 x 10□ (pF)		
88□ → 88□ means 88 x 10□ (pF)		

TRC-1280A (MAIN PB ASS'Y)

SYMBOL NO.	⚠	PART NO.	PART NAME	REMARK
VARIABLE RESISTOR				
R1001		CEX40327-001	VR (Tuning)	200kΩ B
1004		QVZ3507-224	" (VHL Sub Tuning)	220kΩ "
1007		" -224	" (VHH ")	" "
1008		" -224	" (UH ")	" "
1009		CEX40358-473	" (VL ")	47kΩ "
1010		" -473	" (UL ")	" "
1109		" -103	" (Noise)	10kΩ "
1211		A76193-223	" (Sub Contrast)	22kΩ "
1212		CEX40118-B14M	" (Picture)	10kΩ "
1216		A76193-222	" (Sub Bright)	2.2kΩ "
1217		CEX40119-B52M	" (Bright)	500Ω "
1305		A76193-222	" (Sub Colour)	2.2kΩ "
1306		CEX40119-B14M	" (Colour)	10kΩ "
1313		A76193-473	" (PAL Sub Colour)	47kΩ "
1343		QVZ3507-102	" (DL Amp.)	1kΩ "
1407		CEX40118-B25M	" (V. Hold)	200kΩ "
1409		CEX40358-103	" (V. Height)	10kΩ "
1422		A76195-471	" (V. Center)	470Ω "
1511		CEX40358-103	" (H. Hold)	10kΩ "
1615		CEX40374-D24	" (Volume)	20kΩ D
1702		CEX40357-022	" (G. Drive)	200Ω B
1703		" -022	" (R. Drive)	" "
1710		" -053	" (B. Cutoff)	5kΩ "
1711		" -053	" (G. Cutoff)	" "
1712		" -053	" (R. Cutoff)	" "
1907		CEX40358-102	" (11V Adjust)	1kΩ "
RESISTOR				
R1713		QRG019J-123S	OM R	12kΩ 1W J
1714		" -123S	"	" " "
1715		" -123S	"	" " "
1901		QRF154J-8R2	UNF R	8.2Ω 15W "
1906	⚠	QRV141F-2701Y	MF R	2.7kΩ ¼W ±1%
1908	⚠	" -2701Y	"	" " "
CAPACITOR				
C1001		QEB51HM-104M	E Cap.	0.1μF 50V M
1005		QETB1CM-106	"	10μF 16V "
1007		QEM51CK-336M	"	33μF " K
1008		QETB1HM-105	"	1μF 50V M
1009		QETB1CM-477	"	470μF 16V "
1112		QCT25CH-101Z	C Cap.	100pF 50V J
1113		" -220AZ	"	22pF " "
1115		QEE51VK-474B	Tan. Cap.	0.47μF 35V K
1119		QETB0JM-336	E Cap.	33μF 6.3V M
1120		QCT25CH-101	C Cap.	100pF 50V J
1121		QETB1AM-477	E Cap.	470μF 10V M
1204		QEU51CM-337M	"	330μF 16V "
1205		QEK51HM-105GM	"	1μF 50V "
1206		QEM51CK-336M	"	33μF 16V K
1209		QEU51CM-337M	"	330μF " M
1303		QEK51HM-105GM	"	1μF 50V "
1320		QAT3001-010	Trimmer Cap.	
1331		QCT25UJ-330Z	C Cap.	33pF 50V J
1332		" -560Z	"	56pF " "
1333		" -330Z	"	33pF " "
1334		" -680Z	"	68pF " "
1352		QEE51VK-105B	Tan. Cap.	1μF 35V K
1354		" -105B	"	" " "
1357		" -105B	"	" " "
1402		QFZ0083-683MZ	M Cap.	0.068μF 50V "
1403		QEN51HM-474	BP E Cap.	0.47μF " M
1404		QFV71HJ-224MZ	T F Cap.	0.22μF " J
1405		QEE61CK-225BZ	Tan. Cap.	2.2μF 16V K
1406		QETB1CM-107	E Cap.	100μF " M
1408		QEE61CK-225BZ	Tan. Cap.	2.2μF " K

SYMBOL NO.	⚠	PART NO.	PART NAME	REMARK
C1409		QETB1EM-108	E Cap.	1000μF 25V M
1410		QETB1CM-477	"	470μF 16V "
1411		QEB51HM-104M	"	0.1μF 50V "
1413		QETB1EM-107	"	100μF 25V "
1501		QEK51HM-105GM	"	1μF 50V "
1516		QEN51HM-474	BP E Cap.	0.47μF " "
1519	⚠	QFP32DJ-273M	PP Cap.	0.027μF 200V J
1520	⚠	" -273M	"	" " "
1521	⚠	" -273M	"	" " "
1522		QET52CR-336	E Cap.	33μF 160V R
1523		QETB1CM-108	"	1000μF 16V M
1524		QEM51VM-107M	"	100μF 35V "
1525		" -336M	"	33μF " "
1532		QFP31HJ-152S	PP Cap.	1500pF 50V J
1607		QCT25CH-120AZ	C Cap.	12pF " "
1608		QETB1CM-106	E Cap.	10μF 16V M
1611		QEB51HM-104M	"	0.1μF 50V "
1614		QFV81HJ-154M	TF Cap.	0.15μF " J
1704		QCZ9017-102M	C Cap.	1000pF 3kV P
1903		QEU51CM-337M	E Cap.	330μF 16V M
COIL				
L1001		A49468-101U	Peaking Coil	100μH
1101		CE40453-1R8	"	1.8μH
1102,3		CE40401-8R2	"	8.2μH
1104		A76186-8.2Z	"	"
1105		A76186-6.8	"	6.8μH
1106		A76186-2.7	"	2.7μH
1107		A04872-80	"	80μH
1201		CE40401-470	"	47μH
1301		A76186-8.2Z	"	8.2μH
1302		A49468-562	"	5600μH
1303		CE40084-181	"	180μH
1401		A76186-1000	"	1000μH
1502		CE40581-450	Coil	
1503		" -660	"	
1504		" -150	"	
1505		CE40544-001	H. Line Coil	
1506		A49468-101U	Peaking Coil	100μH
1507		A04725-2.2	"	2.2μH
1508		A76186-150	"	150μH
1601		A04872-80	"	8μH
1602		A76186-15Z	"	15μH
TRANSFORMER				
T1101		CE40455-301	1st PIF Transf.	
1103		CE40123-700	AFC Transf.	
1104		CE40119-301	C W Transf.	
1301P		CE40443-001	BP Transf.	
1301S		CE40397-001	Bell Transf.	
1302P		CE40395-001	CW Transf.	
1302S		" -001	"	
1303		CE40636-001	DL P. Transf.	
1304		CE40399-001	Discri. Transf.	
1305		" -001	"	
1501		CE40543-001	H. Drive Transf.	
1502	⚠	CJ39591-001	H.V. Module	
1601		CE40633-001	SIF Transf.	
1602		CE40634-002	"	
DIODE				
D1001		1SS133	Si. Diode	
1008		HZT33	Zener Diode	
1201		1SS133	Si. Diode	
~ 3				
1204		MA4110(M)	Zener Diode	
1301, 05		1SS133	Si. Diode	
1302		MA4068(L)	Zener Diode	
1303		RD2.7E(B)	"	

SYMBOL NO.	⚠	PART NO.	PART NAME	REMARK
D1304		RD9.1E(B3)	Zener Diode	
1401,2		1SS133	Si. Diode	
1403		1SR35-100A	"	
1501		1SS133	"	
1502		MA4075(M)	Zener Diode	
1503		1SS133	Si. Diode	
1504		V19E	"	
1505		1SR124-400A	"	
~ 7				
1508	⚠	HZ7B2L	Zener Diode	
1509		1SS133	Si. Diode	
1601		"	"	
~ 5				
1606		MA4110(M)	Zener Diode	
1901		1SR35-100A	Si. Diode	
1902		1SS133	"	
1903	⚠	MA4056(H)	Zener Diode	
1904,5		1SS133	Si. Diode	
1906		LN842RP	LED	POWER IND.
TRANSISTOR				
Q1001		2SD637(Q,R)	Transistor	
1002		2SB641(Q,R)	"	
1003		2SD637(Q,R)	"	
1101		2SC1906	Si. Transistor	
1102		2SD638(R,S)	Transistor	
1103,4		2SD637(R,S)	"	
1201		2SB641(Q,R)	"	
1202		2SD637(Q,R)	"	
1301,2		"	"	
1303		2SB641(Q,R)	"	
1401,2		2SC2655(Y)	"	
1403		2SD637(Q,R)	"	
1404		2SB641(Q,R)	"	
1501		2SD639(Q,R)	"	
1502	⚠	2SD1271(P,Q)	Si. Transistor	
1601		2SD637(Q,R)	Transistor	
1602		2SD1265(Q,P)	"	
1603		2SB641(Q,R)	"	
1701		2SC3187	Si. Transistor	
~ 3				
1901		2SB953A(P,Q)	"	
1902		2SB641(Q,R)	Transistor	
1903		2SD637(Q,R)	"	

SYMBOL NO.	⚠	PART NO.	PART NAME	REMARK
IC				
IC1001		AN5700	IC	
1101		TA7607AP	"	
1201		TA7698AP	"	
1301		M51397AP	"	
1601		AN5732	"	
1602		AN7130	"	
OTHERS				
R1201	⚠	CE40731-4R7A	Posistor	4.7Ω
1527	⚠	" -3R3	"	3.3Ω
1529	⚠	" -100	"	10Ω
1530, 1	⚠	" -3R3	"	3.3Ω
1618	⚠	" -4R7A	"	4.7Ω
FR1420	⚠	QRZ0054-100M	FR	10Ω 1/4W J
1518	⚠	" -2R2M	"	2.2Ω " "
F1901	⚠	QMF51E2-2R05	Fuse	2A
J1201, 2		CEX40221-001	Jack	VIDEO IN/OUT
1601, 2		" -002	"	AUDIO IN/OUT
1603		CEX40288-001	Earphone Jack	
1901		CEX40329-001	EXT DC Jack	
S1001		CEX40055-005	Push SW.	VHF/UHF
1002		CEX40078-002	Lever SW.	SERVICE
1101		QSS1201-001	Slide SW.	AFC SW.
1201		CEX40055-002	Push SW.	TV/EXT
1202		CEX40078-002	Lever SW.	SERVICE
1301		CEX40059-005	Slide SW.	TV SOUND
1302		" -006	"	COLOUR SYSTEM
1501		CEX40078-002	Lever SW.	H. CENTER
1901		CEX40328-001	Power SW.	POWER SW.
TU1001		EK7015ES	E Tuner	
SF1101		CE40050-402	Saw Filter	
CT1101		A76137	C Trap.	
1102		A76138	"	
1103		A76139	"	
CF1601		A75417-C	Ceramic Filter	
1602		A75088-C	"	
1603		A75111-C	"	
DL1201		CE40714-001	Delay Line	
1301		A76350	1H Delay Line	
X1101		A75087	Piezonator	
1301		A76090	Crystal	
K1501		CE40155-001	Core	
	⚠	CE40541-00A	CRT Socket	

[PACKING DIAGRAM]

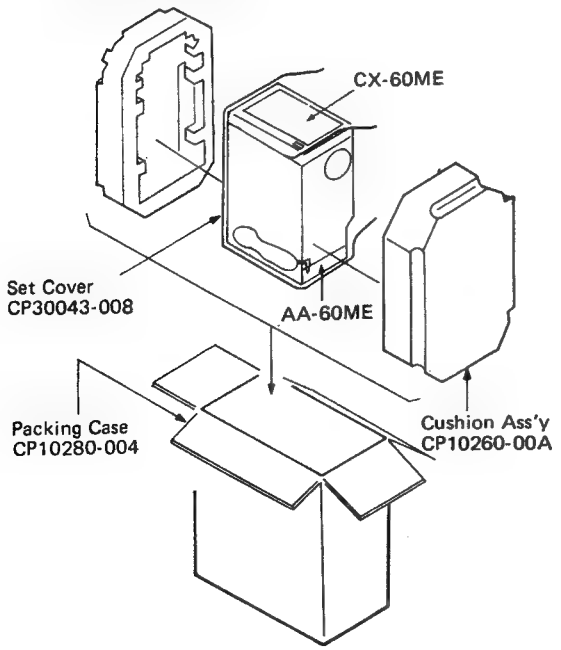

ATTACHED MATTERS

Inst. Book CX-60ME-IB-A
Safety Tips BT-20067
Notice Card A76339-2

OPTIONAL ACCESSORIES

Rechargeable Battery CB-60E
Auto Plug AP-23

■ DIMENSION AND WEIGHT

Weight : 2.5 kg (Main body)
: 800 g (AC Adaptor)

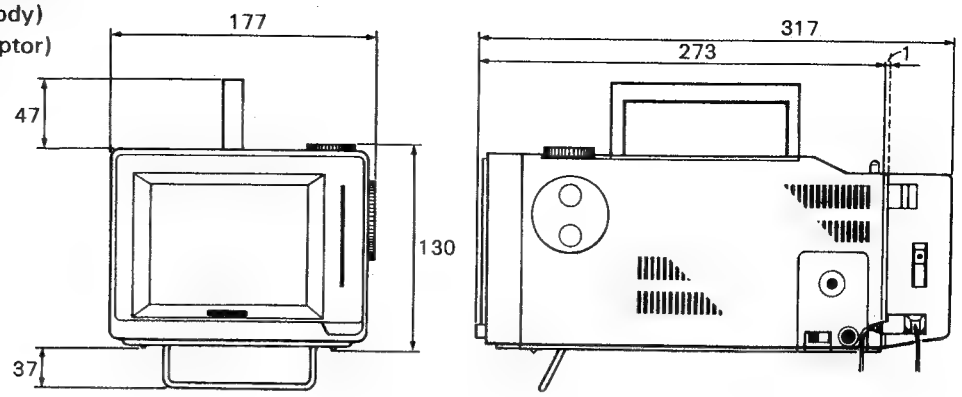

(Unit: mm)

CHASSIS AND CABINET PARTS LIST

VIEW NO.	SYMBOL NO.	⚠	PART NO.	PART NAME	REMARK
1	V01	⚠	150CHB22-AE	Picture Tube	
2	DY01	⚠	CJ26200-00A	Def. Yoke Ass'y	
3			CE40666-00A	S. Wedge	(x2)
4			CM42291-A01	Earth Spring	
5			EAS-8P16SH	Speaker	
6			CM10244-A0C	Front Panel Ass'y	
7			CM41318-001	Brand Mark	within Front Panel Ass'y
8			CM42054-A03	Channel Window	
9			CM42056-001	Knob Cap.	Power SW.
10			CM42055-001	Power Knob	
11			CM30861-013	Spring	
12			CM42068-A01	Stand	
13			CM10246-A03	Bottom Cover	
14			CM30996-A0A	Tuning Ass'y	
15			CM42214-001	Belt	within Tuning Ass'y
16			CM42216-00A	Needle Ass'y	
17			CM42066-005	Push Knob	(x2) TV/EXT.,VHF/UHF
18			CM42067-A01	Knob Cap.	(x2) TV/EXT., VHF/UHF KNOB
19			CM30861-A12	Spring	(x2) " " "
20			CM10241-A02	Top Cabinet	
21			CM20425-001	Protector Glass	
22			CM20502-A0A	Ant. Terminal Ass'y	
23			CM30998-005	Handle	
24			A48960-3	Pin	(x2) Handle
25			CM31025-00E	Tuning Knob	
26			CM42064-005	Volume Knob	
27			CM40835-001	Pin Holder	(x2)
28			CM41686-00B	Rod Ant. Ass'y	
29			CM20505-001	Rating Label	
30			CM42475-001	Foot	(x2)
31	TU1001		EK7015ES	VHF/UHF E Tuner	
32	S1901		CEX40328-001	Power Switch	
33	T1502	⚠	CJ39591-001	H V Module	
34			CH40321-008	TFC Connector	(x2)
35			CM40574-008	Washer	(x2) Handle
36			CM42419-001	Stand Spring	
37	D906		LN842RP	LED	Power Indicator
38			CM42388-001	Knob Washer	Tuning Knob
39			CM42535-A02	Operation Sheet	
40			A76235	Channel Chart	

[EXPLODED VIEW]

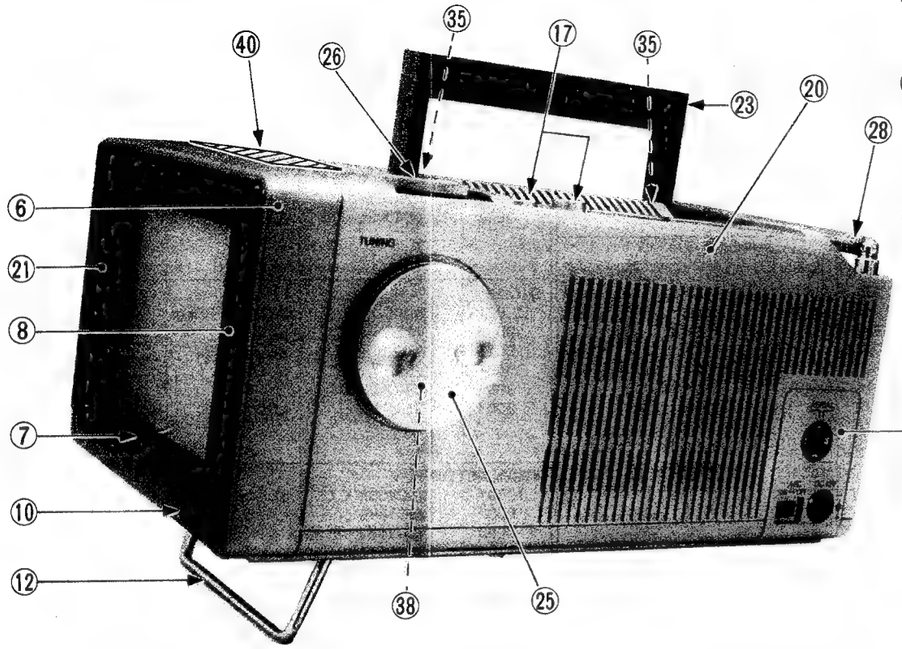

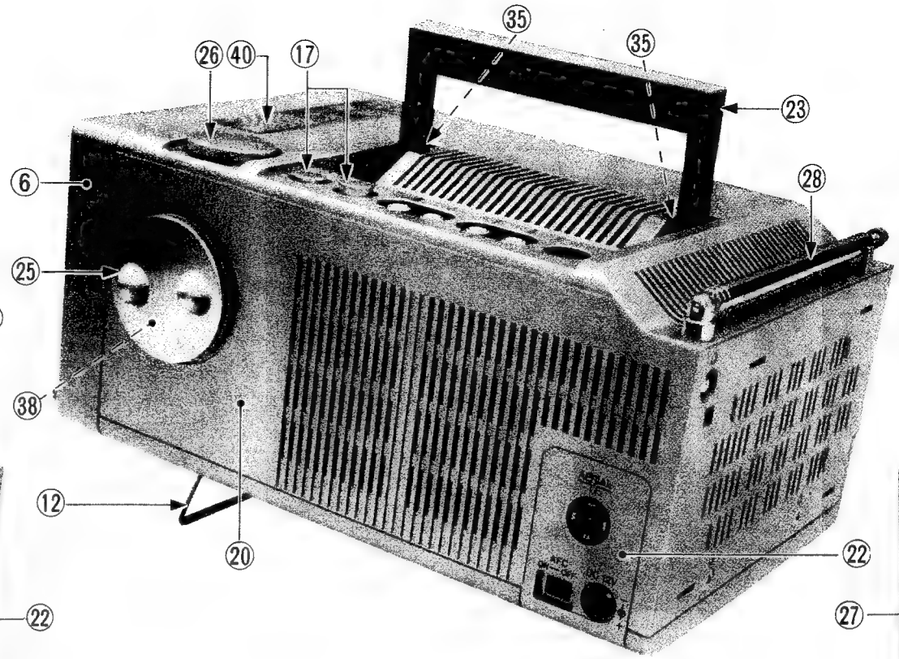

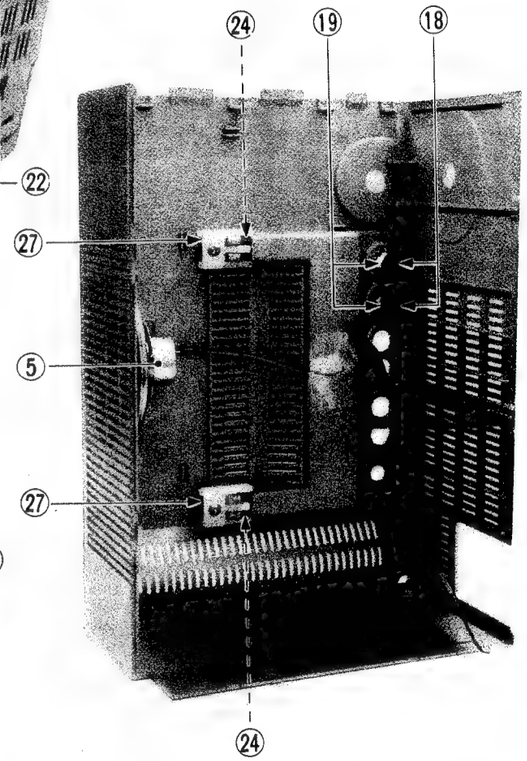

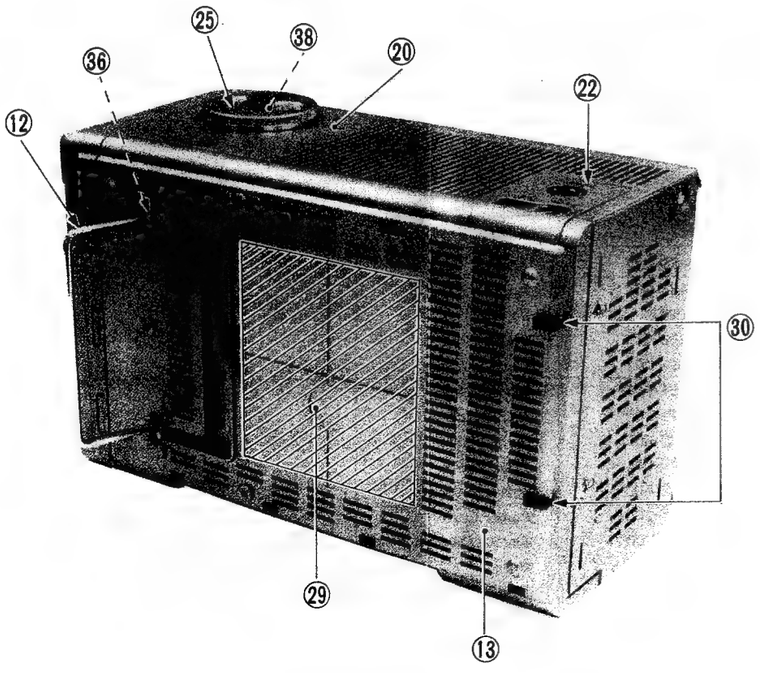

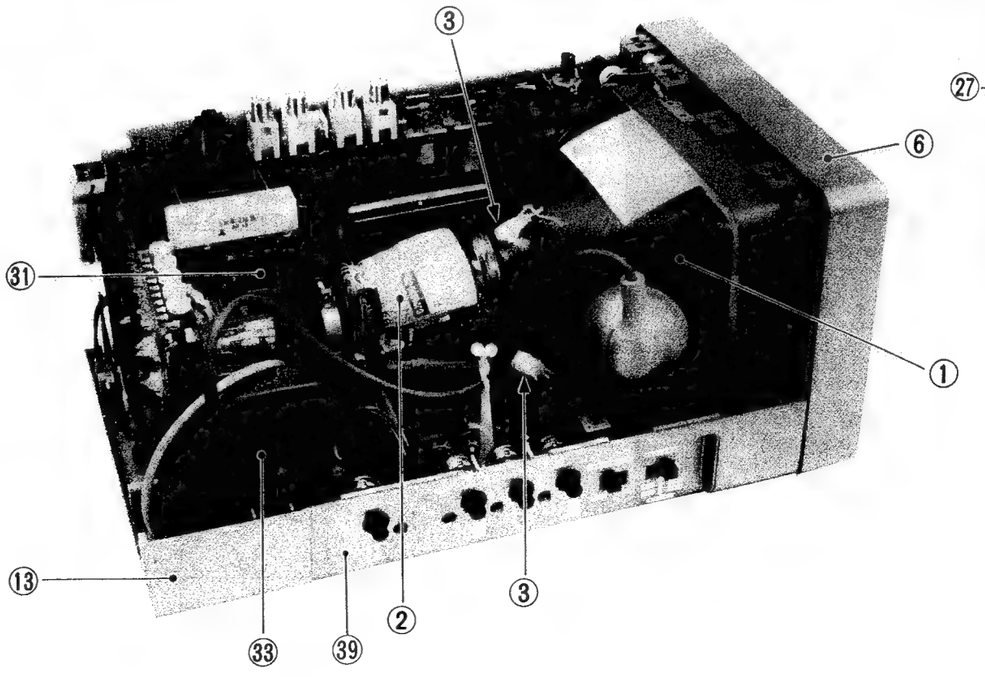

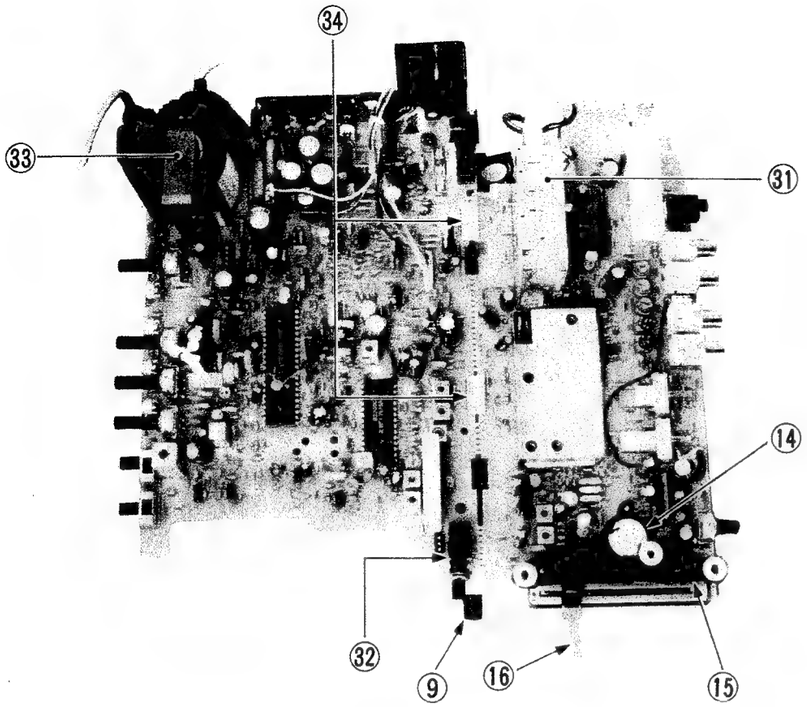

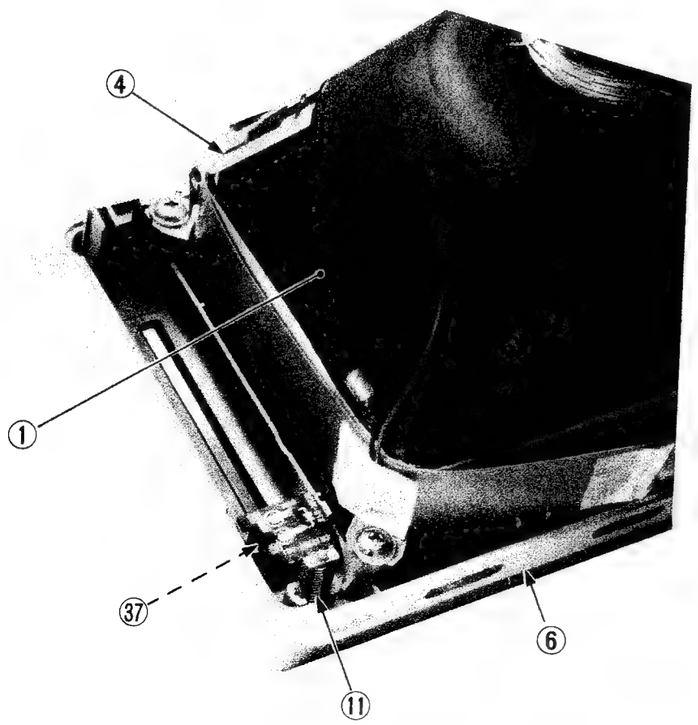

8. AC POWER ADAPTOR (AA-60ME)

SPECIFICATIONS
Output Voltage : DC12.5V
Output Current : 1.4A

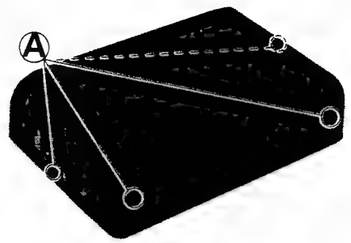

Fig. 8-1

■ HOW TO REMOVE FOR SERVICE REMOVING THE ADAPTOR COVER

Unscrew the four screws (A) in Fig. 8-1 and remove the adaptor cover.

■ REPLACEMENT PARTS LIST TRC-9280A (POWER PB ASS'Y)

SYMBOL NO.	⚠	PART NO.	PART NAME	REMARK
VARIABLE RESISTOR				
R9021		CEX40358-222	VR (Output Voltage Adj.)	2.2kΩ B
RESISTOR				
R9002		QRF056K-1R8C	UNF R	1.8Ω 5W K
9008		QRG019J-223S	OM R	22kΩ 1W J
9010		QRX019J-1R0S	MF R	1Ω " "
9020		QRD141J-392SY	C R	3.9Ω ¼W "
9022		" -103SY	"	10kΩ " "
9023		QRX019J-6R8S	MF R	6.8Ω 1W "
9026		QRG019J-821S	OM R	820Ω " "
9030		QRG019J-223S	"	22kΩ " "
9032		QRG019J-471S	"	470Ω " "
9036,7		QRG019J-223S	"	22kΩ " "
9038	⚠	QRZ0057-685	C R	6.8MΩ " "
CAPACITOR				
C9001	⚠	QFZ9017-104M	MM Cap.	0.1μF AC250V M
9003, 4	⚠	QCZ9011-222M	C Cap.	2200pF AC400V "
9007	⚠	QFZ9017-104M	MM Cap.	0.1μF AC250V "
9009,10	⚠	QCZ9011-222M	C Cap.	2200pF AC400V "
9011		QEZ0085-107M	E Cap.	100μF
9014		QEE51VK-474B	Tan. Cap.	0.47μF 35V K
9015		QFH52BK-103M	MM Cap.	0.01μF 125V K
9016,18		QCS13DM-331U	C Cap.	330pF 2kV M
9021		QEE51VK-474B	Tan. Cap.	0.47μF 35V K
9022		QEM51CK-476M	E Cap.	47μF 16V "
9028		QFZ0083-104M	M Cap.	0.1μF 50V K
9029	⚠	QCZ9011-472M	C Cap.	4700pF AC400V M
9031		QEN51HM-335	BP E Cap.	3.3μF 50V "
9036,7	⚠	QCZ9011-222M	C Cap.	2200pF AC400V M
9038,9		QCZ9011-222M	"	" " "
9041		QEN41HM-335	BP E Cap.	3.3μF 50V "
9042	⚠	QCZ9011-472M	C Cap.	4700pF AC400V

SYMBOL NO.	⚠	PART NO.	PART NAME	REMARK
TRANSFORMER				
T9001	⚠	CE40710-00A	Line Filter	
9002	⚠	A76567-MA	P. Drive Transf.	
9003	⚠	CE40638-00A	Switching Transf.	
DIODE				
D9001		W006	Si. Diode Bridge	
9002		V19G	Si. Diode	
9003		RD7.5E(B2)	Zener Diode	
9004,5		V09E	Si. Diode	
9006		ESAB82-004	"	
9007		GL-3PR2	LED	MAIN POWER IND.
TRANSISTOR				
Q9001		2SC2688(K,L)	Si. Transistor	
9002		2SC1685	"	
9003		2SD1453	"	
9004		2SC1627A	"	
9005		2SC2688(K,L)	"	
COIL				
L9001		CE30001-420	Heater Choke	
IC				
IC9001		AN5900	IC	
OTHER				
K9001~3		CE40155-001	Core	
F9001	⚠	QMF51E2-2R5S	Fuse	2.5A
R9003	⚠	CE40643-001	Posistor	
		CEX40061-001	Plug & Lead Ass'y	

CHASSIS AND CABINET PARTS LIST

VIEW NO.	SYMBOL NO.	⚠	PART NO.	PART NAME	REMARK
1			CM20431-002	Adaptor Base	
2			CM20433-A01	Adaptor Case	
3			SSSP3005Z	Screw	(x4)
4			CM40258-A01	Spring Holder	
5			CM42581-001	Lock Bracket	
6			CM30861-015	Spring	
7			CM42079-002	Lock Knob	
8			CM42136-003	Serial Plate	
9			CM42142-001	Blind Sheet	
10			CM20432-A03	Adaptor Cover	
11		⚠	QMP4018-200R	Power Cord	
12	S9001	⚠	CEX40376-001	See Saw Switch	Main Power
13	F9001	⚠	QMF51E2-2R5S	Fuse	2.5A
14			CEX40061-001	Plug & Lead Ass'y	
15			CM31274-001	Insulator	
16			QHS3876-162	Cord Clamp	

[EXPLODED VIEW]

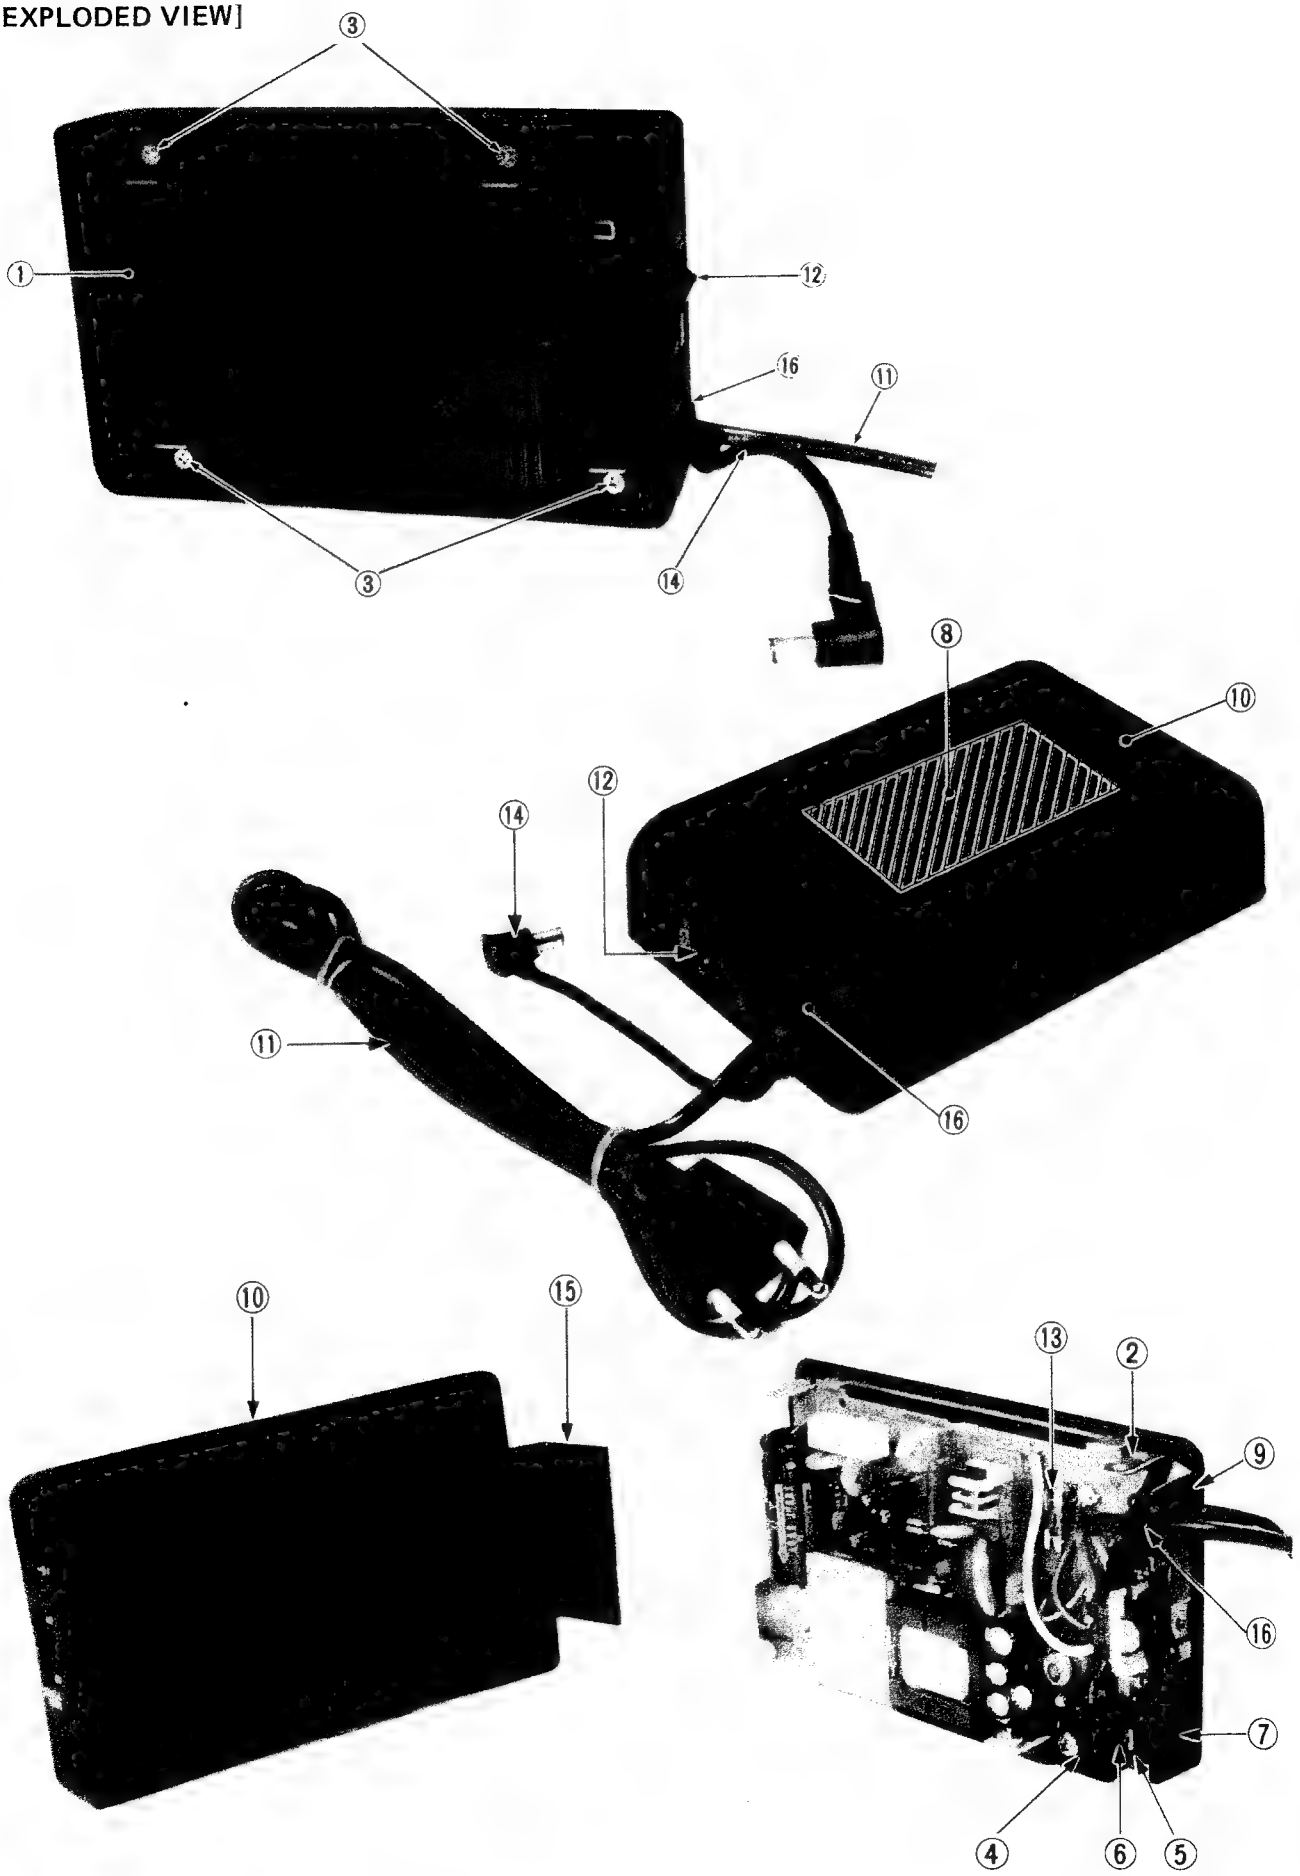

9. OPTIONAL ACCESSORIES

(1) RECHARGEABLE BATTERY (CB-60E)

SPECIFICATIONS

Dimension : (W) 16.8 cm x (D) 5.9 cm x (H) 10.7 cm
Weight : 1.0 kg

Type	: Cylinder-closed type nickel-cadmium battery pack
Nominal voltage	: DC 12 V
Nominal capacity	: 2,200 mAh (5 hour rate)
Standard recharging time	: About 10 hours
Number of charging/ discharging cycles	: About 500 times
Operating temperature range	: 0°C ~ 40°C (32°F ~104°F) for charging −10°C ~ 40°C (−50°F ~104°F) for discharging −10°C ~ 30°C(−50°F ~ 86°F) in storage
Polarity of output plug	: ⊕—◉—⊖
Semiconductor Quantity	: IC 1, Transistor 5

■ BATTERY SERVICE LIFE

	CB-60E Rechargeable Battery
When TV is playing	Approx. 100 minutes
Charging time	Approx. 10 hours

- This table is given for reference.
- Measurement was made when sound volume, colour tone, colour shade, brightness and picture knobs were centered and temperature at 20°C. The service life represents the time when both ends of the screen have begun to break off a little.

■ NOTE FOR CHARGING THE BATTERY FROM A CAR BATTERY

- Do not use an auto plug other than that specified.
- Be sure to charge while letting the car's engine idle. This is because it may become impossible to start the engine due to discharging for an extended period of time and draining the power of the car battery.
- It will take about 10 hours to fully charge the battery pack.

DO'S AND DON'TS FOR USING THE CB-60E BATTERY PACK

1. Do not use the CB-60E in combination with TV sets or charging units other than specified models.
   * The specified models refer to the JVC CX-60ME the provided AC power adaptor, and the models which are specified that they should be used in combination with the CB-60E in JVC instruction manuals.
2. Using the battery pack until the picture on the TV screen disappears will decrease its life.
   Therefore, recharge it as soon as possible if the TV picture begins to shrink.
3. If the battery pack becomes overdischarged, remove it from the TV, leave it untouched for more than 5 hours, and then recharge it.
4. Avoid charging continuously for more than 48 hours because this will decrease the battery pack's life.
5. When the battery pack has been overcharged at an excessive temperature, the charge indicator lamp will automatically go out, by means of a heat protection device.
   In this case, stop charging immediately, leave the battery pack untouched in a place of low temperature until it becomes normal, and after that, connect the battery pack to the TV set.
6. The battery will discharge naturally even when it is not used: The current capacity decreases proportionately. Therefore, be sure to recharge it before putting it to use.
7. The battery has reached the end of its life if the period of time that it can be used continuously becomes extremely short in spite of properly recharging it.
8. Observe the following "Don'ts": These could result in operation problems and malfunctioning.
   - Don't try to disassemble and reconstruct the battery pack.
   - Don't store it in a place of excessively high temperature.
   - Don't discard it into a fire.
   - Under no circumstances, short the battery pack's terminals.

■ REPLACEMENT PARTS LIST

TRC-9281A (CHARGER PB ASS'Y)

SYMBOL NO.	⚠	PART NO.	PART NAME	REMARK
RESISTOR				
R9003		QRG019J-331S	OM R	330Ω 1W J
9012		QRF106K-180	UNF R	18Ω 10W K
CAPACITOR				
C9002		QETB1VM-227	E Cap.	220μF 35V M
COIL				
L9001		CE40568-001	Choke Coil	
DIODE				
D9001		RD11E(B1)	Zener Diode	
9002		V19E	Si. Diode	
9003		V06C	"	
9004		GL-3PR2	LED	CHARGER IND.
9005		RD5.6E(B2)	Zener Diode	

SYMBOL NO.	⚠	PART NO.	PART NAME	REMARK
TRANSISTOR				
Q9001		2SD637(Q,R)	Transistor	
9002		2SD1133(C,D)	Si. Transistor	
9003		2SD637(Q,R)	Transistor	
~ 5				
IC				
IC9001		AN5900	IC	
OTHER				
F9001	⚠	QMF51E2-2R0S	Fuse	2A
9002	⚠	" -2R5S	"	2.5A

CHASSIS AND CABINET PARTS LIST

VIEW NO.	SYMBOL NO.	⚠	PART NO.	PART NAME	REMARK
1			CEX40066-001	Slide Switch	
2			A75907-A	EXT Battery Jack	
3			CEX40061-001	Plug & Lead Ass'y	
4			CE40571-00A	Battery	
5			CM20457-A02	Battery Base	
6			CM20458-B02	Battery Cover	
7			CM40258-A01	Spring Holder	
8			CM42581-001	Lock Bracket	
9			CM30861-015	Spring	
10			CM42079-002	Lock Knob	
11			CM42188-001	Hook	(x2)
12			CM42189-001	"	(x2)
13			CM42156-003	Serial Plate	
14			SSSP3006Z	Screw	(x4)
15			CM31004-B10	Stick Sheet	(x3)

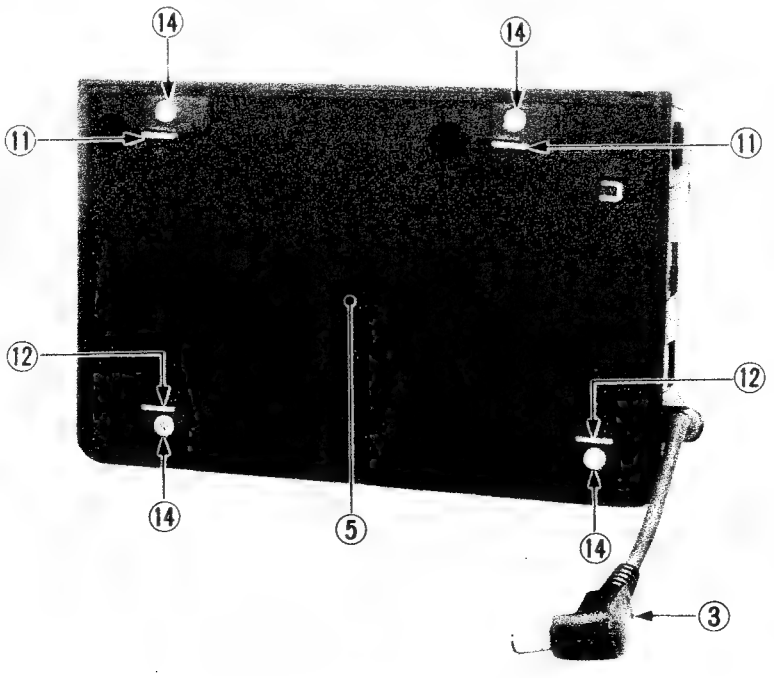

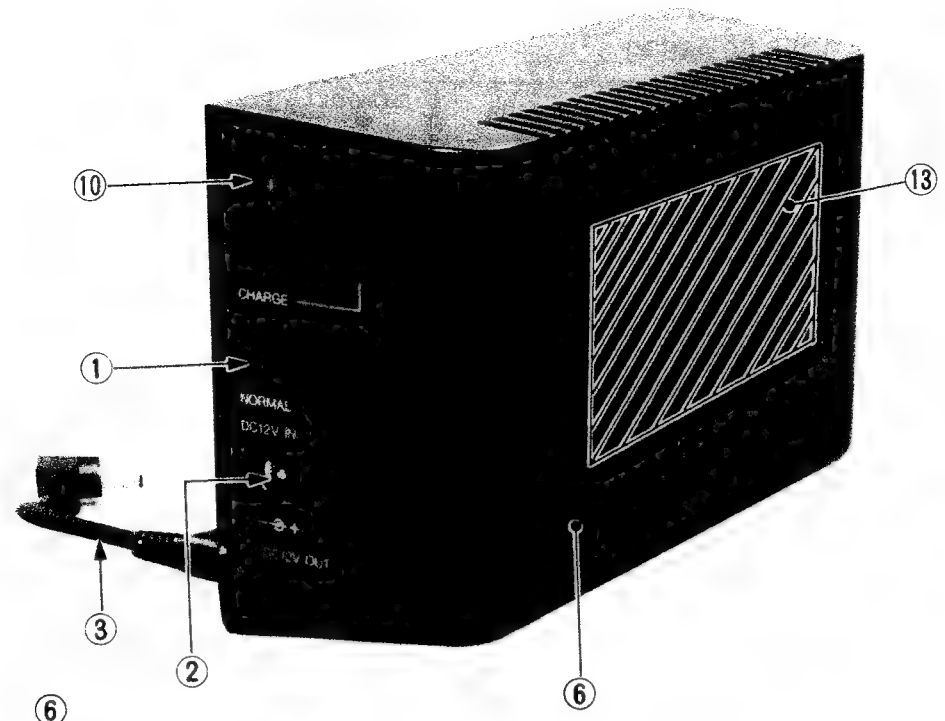

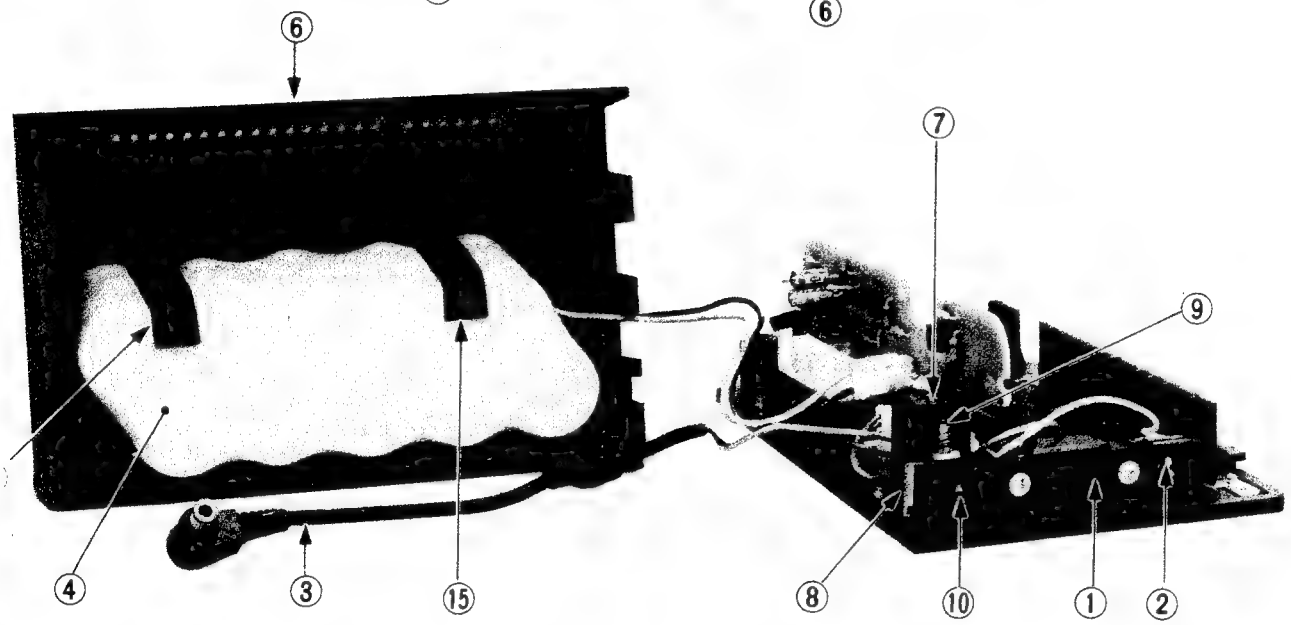

CHARGER PB BACK PATTERN

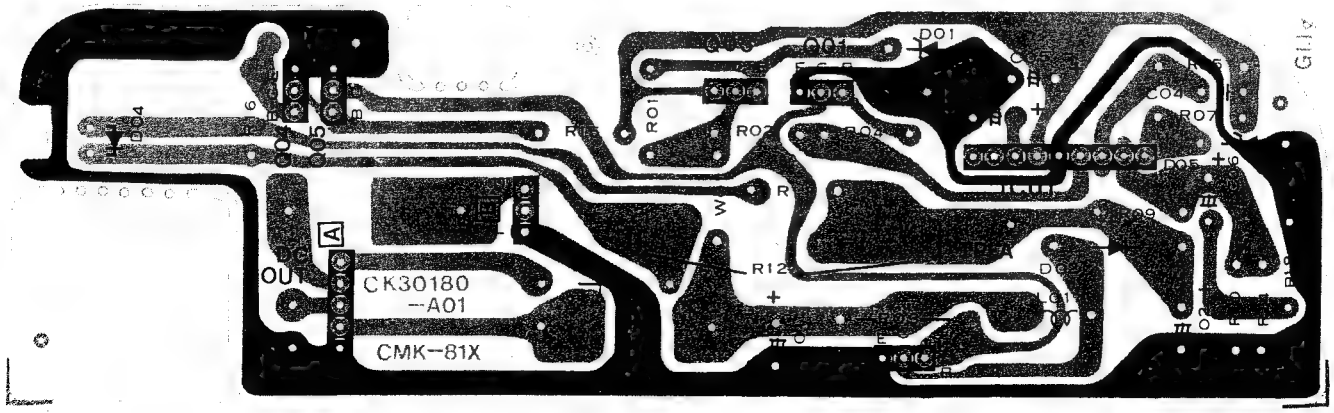

■ PARTS LIST (Shaded parts in the schematic diagram)

Symbol No.	Part No.	Part Name
TRC-9281A (CHARGER PB ASS'Y)		
F9001	QMF51E2-2R0S	Fuse (2.0A)
F9002	QMF51E2-2R5S	" (2.5A)

■ SYMBOL NO. DISPLAY METHOD OF COMPONENTS

○ Inside PC board (example)
TRC-9281A: R9001 → R01

■ CIRCUIT DIAGRAM DISPLAY SYMBOLS

1. Resistor
   - ○ Resistance value
     When no unit is provided: (Ω)
     K: [kΩ]
     M: [MΩ]
   - ○ Rated permissible power capacity
     When no display is made: ¼ [W]
     Others: Display are provided
   - ○ Resistor type
     No type display : Carbon resistor
     OM R : Oxidized metal film resistor
     UNF : Unflammable resistor

2. Capacitor
   - ○ Capacity
     Over 1 [PF] Below 1 [μF]
   - ○ Withstand voltage
     No display : DC 50 [V]
     Others : DC withstand voltage [V]
     AC display : AC withstand voltage [V]
   - ○ Display of electrolytic capacitor is as follows.
     (Example)
     47/50 → Capacity [μF] /withstand voltage [V]
   - ○ Capacitor type
     No type display : Ceramic capacitor
     MY : Mylar capacitor

3. Connecting method
   - □ : Connector
   - o ○ : Wrapping or soldering

CB-60E SCHEMATIC DIAGRAM

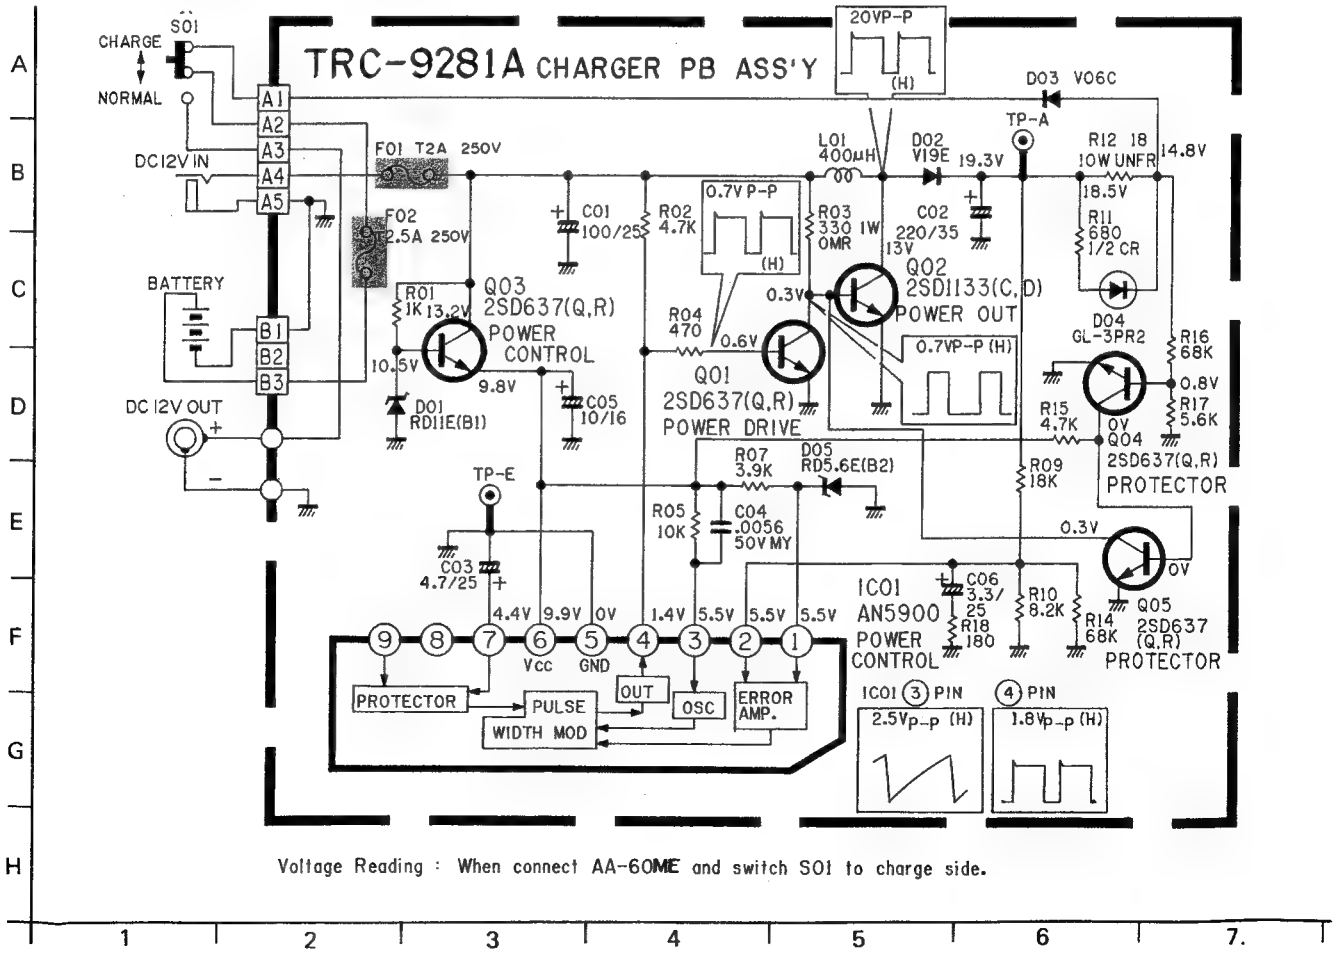

Voltage Reading : When connect AA-60ME and switch SO1 to charge side.

■ PACKING DIAGRAM

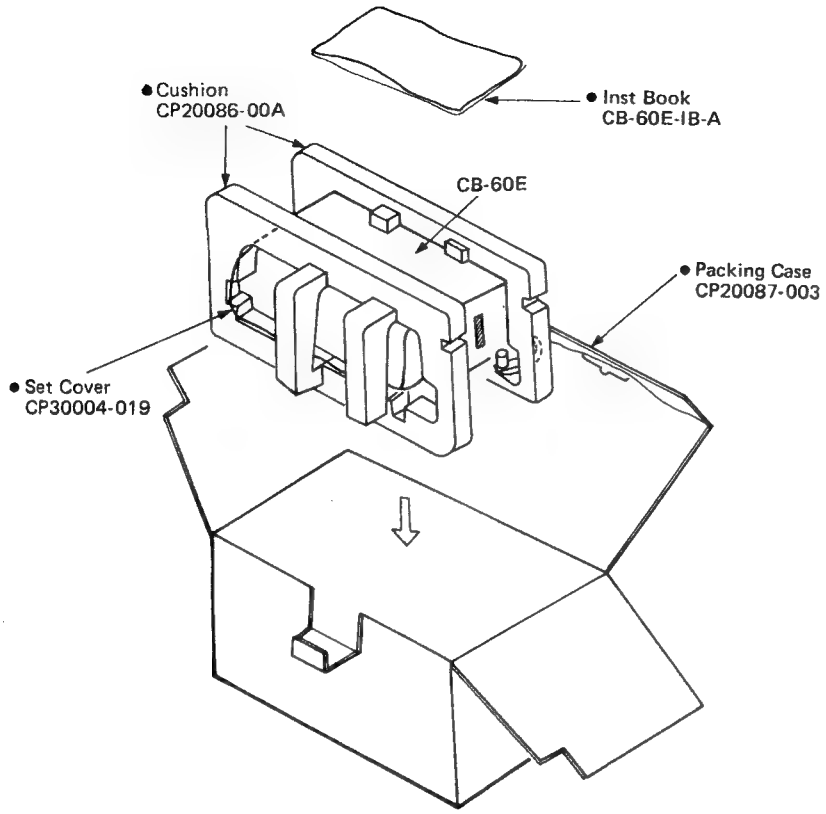

JVC

VICTOR COMPANY OF JAPAN, LIMITED
TELEVISION RECEIVER DIVISION 1106 Iwai-city, Ibaraki-prefecture, 306-06, Japan

Printed in Japan
8403 Nissho
SDK

SCHEMATIC DIAGRAM

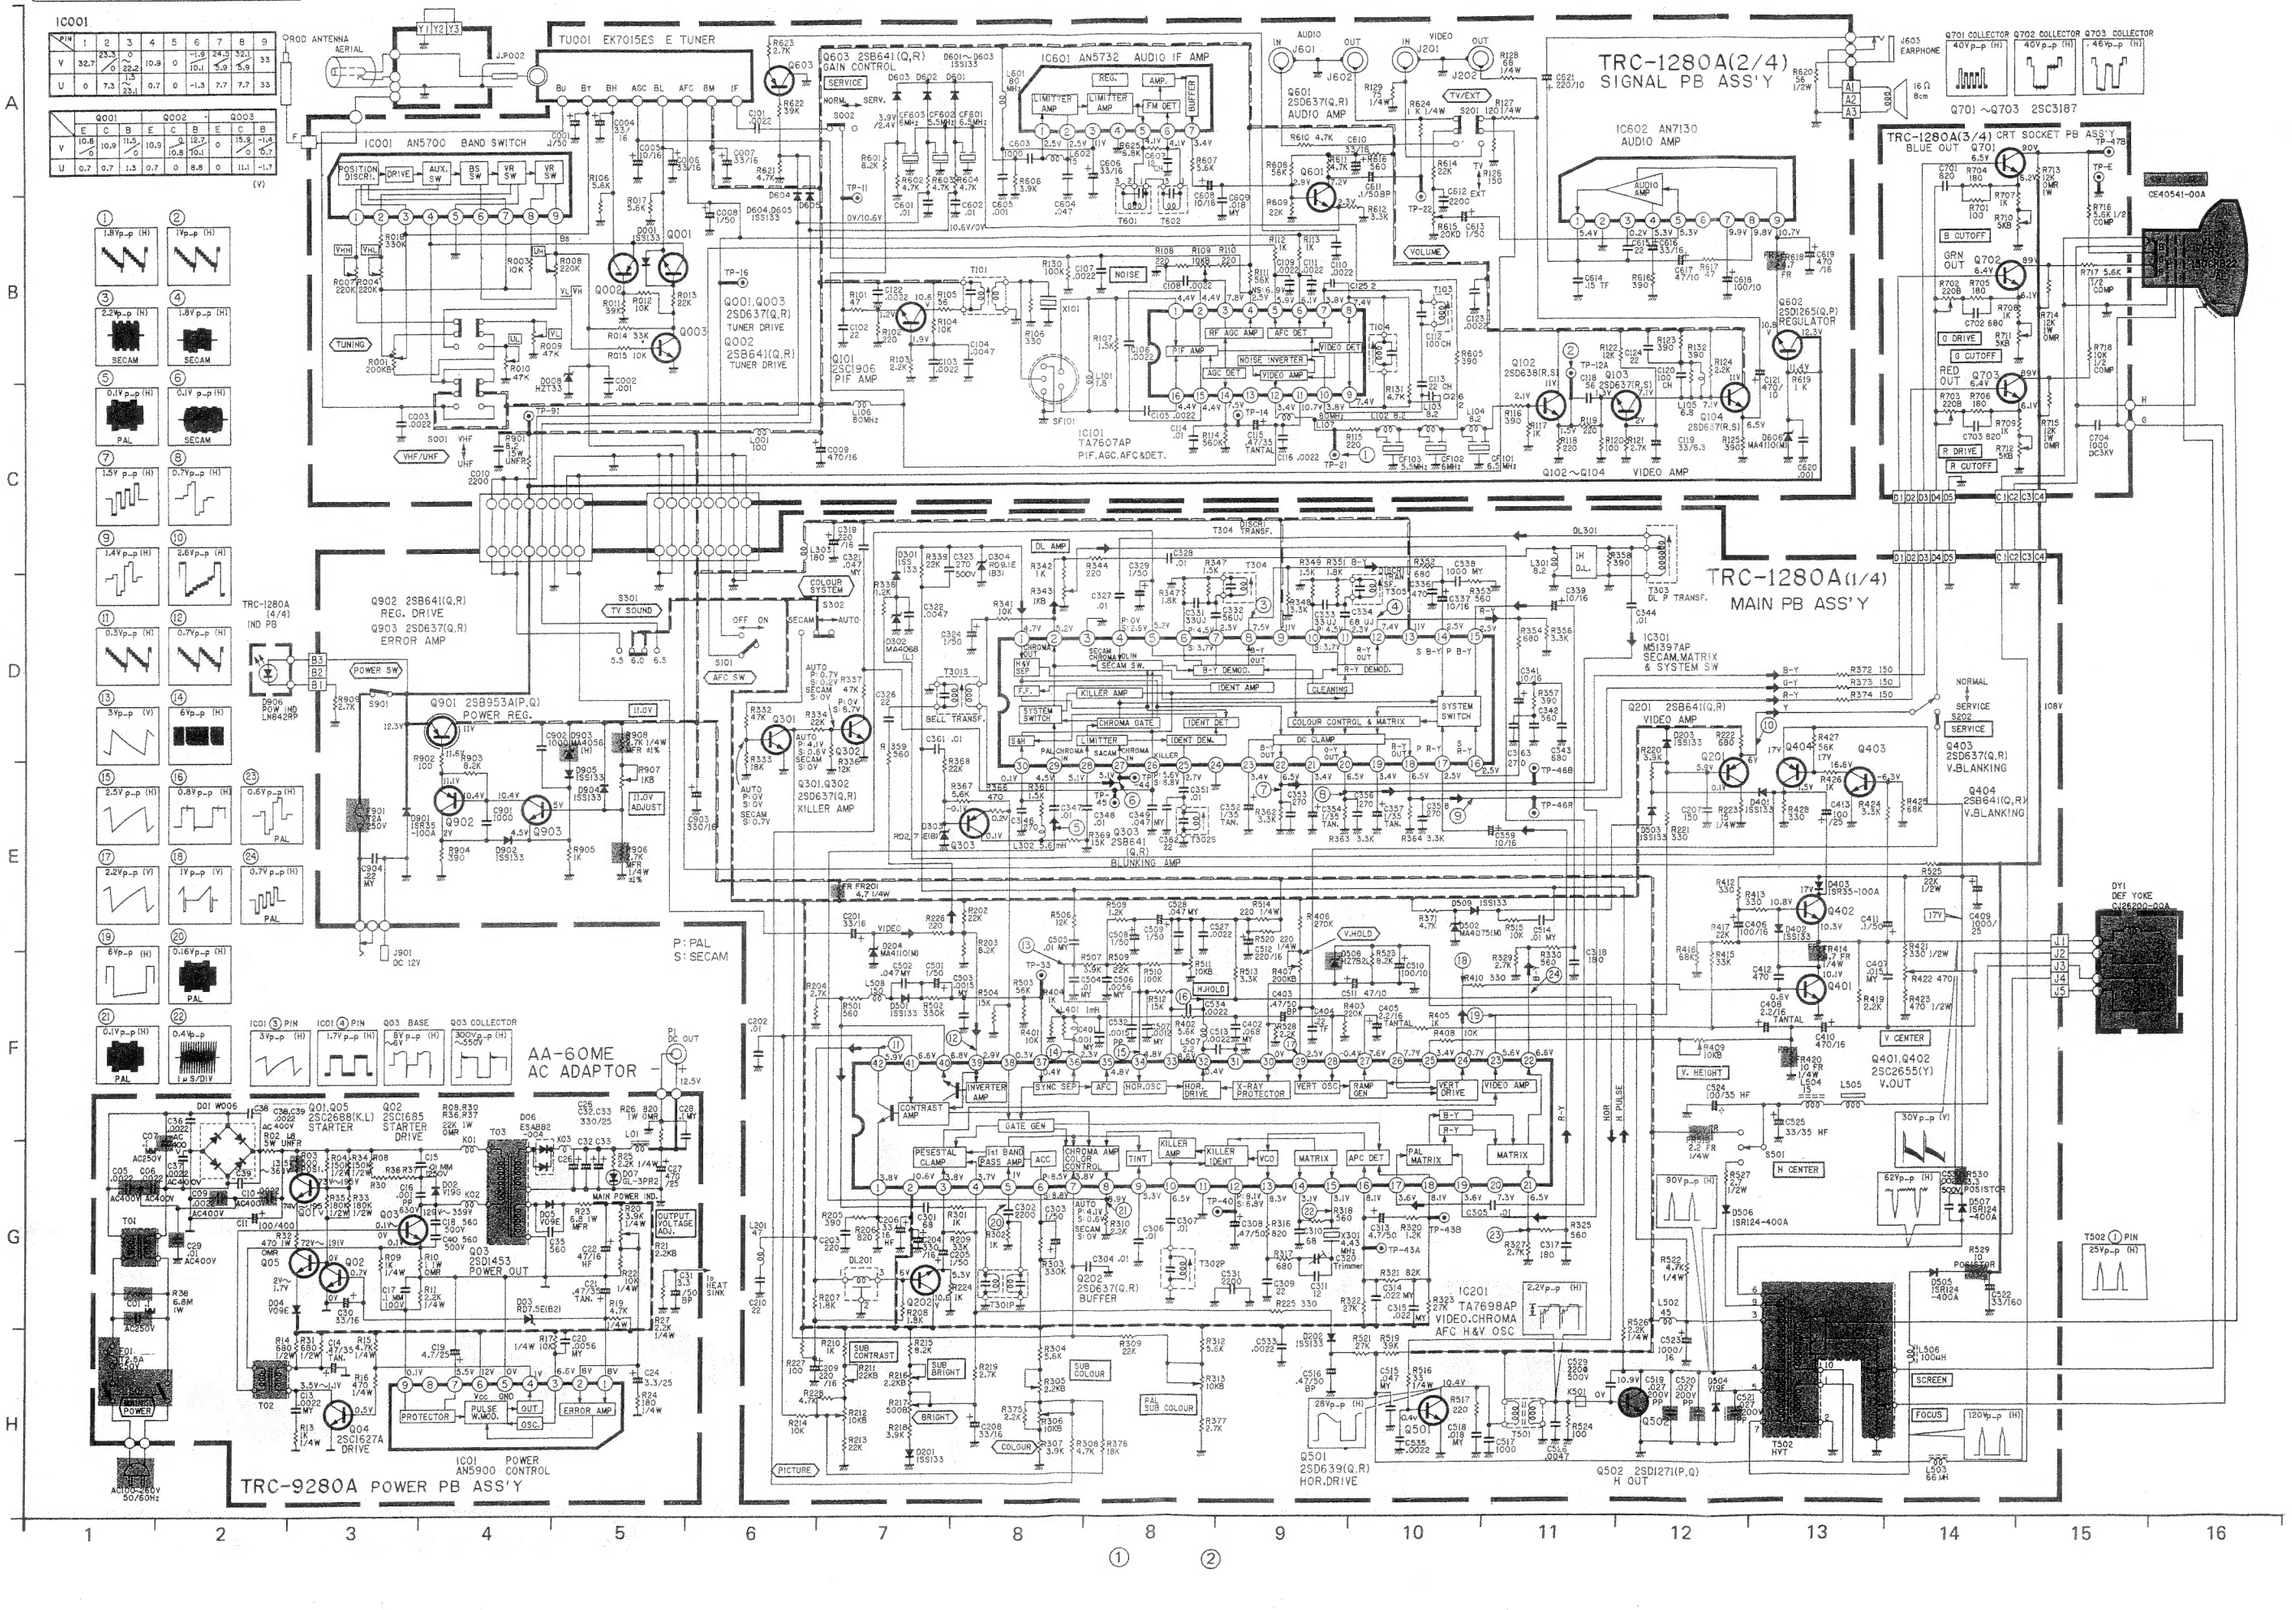
TRC-1280A(2/4) SIGNAL PB ASS'Y
TRC-1280A(3/4) CRT SOCKET PB ASS'Y
TRC-1280A(1/4) MAIN PB ASS'Y
TRC-1280A (4/4) IND PB
TRC-9280A POWER PB ASS'Y
TU001 EK7015ES E TUNER
IC001 AN5700 BAND SWITCH
IC601 AN5732 AUDIO IF AMP
IC602 AN7130 AUDIO AMP
IC101 TA7607AP PIF,AGC,AFC&DET.
IC201 TA7698AP VIDEO,CHROMA AFC H&V OSC
IC301 M51397AP SECAM,MATRIX & SYSTEM SW
IC001 AN5900 POWER CONTROL
AA-60ME AC ADAPTOR
Q601 2SD637(Q,R) AUDIO AMP
Q602 2SD1265(Q,P) REGULATOR
Q701~Q703 2SC3187
Q902 2SB641(Q,R) REG. DRIVE
Q903 2SD637(Q,R) ERROR AMP
Q901 2SB953A(P,Q) POWER REG.
Q903 2SD1453 POWER OUT
Q501 2SD639(Q,R) HOR.DRIVE
Q502 2SD1271(P,Q) H OUT
Q401,Q402 2SC2655(Y) V.OUT
Q201 2SB641(Q,R) VIDEO AMP
Q403 2SD637(Q,R) V.BLANKING
Q404 2SB641(Q,R) V.BLANKING
Q102~Q104 VIDEO AMP
Q301,Q302 2SD637(Q,R) KILLER AMP
Q303 2SB641(Q,R) BLANKING AMP
Q001,Q003 2SD637(Q,R) TUNER DRIVE
Q002 2SB641(Q,R) TUNER DRIVE
Q101 2SC1906 PIF AMP
Q202 2SD637(Q,R) BUFFER
Q902 2SB641(Q,R) REG. DRIVE
Q903 2SD637(Q,R) ERROR AMP
Q001,Q005 2SC2688(K,L) STARTER
Q002 2SC1685 STARTER DRIVE
Q003 2SD1453 POWER OUT
Q004 2SC1627A DRIVE
CE40541-00A
DY1 DEF YOKE CY26200-00A
J603 EARPHONE
16Ω 8cm
OROD ANTENNA
AERIAL
VHF/UHF
TUNING
POWER SW
AFC SW
TV SOUND
COLOUR SYSTEM
OFF ON
SECAM
AUTO
PICTURE
BRIGHT
COLOUR
SUB CONTRAST
SUB BRIGHT
SUB COLOUR
PAL SUB COLOUR
VOLUME
TV/EXT
H CENTER
V CENTER
V. HEIGHT
V.HOLD
H.HOLD
H PULSE
HOR
SCREEN
FOCUS
NORMAL
SERVICE
POWER
AC100~240V 50/60Hz
PROTECTOR
PULSE W.MOD.
OSC.
ERROR AMP
OUTPUT VOLTAGE ADJ.
MAIN POWER IND.
HEAT SINK
DC OUT 12.5V
DC 12V
DC 11.0V
ADJUST
PAL
SECAM
P: PAL
S: SECAM
Q701 COLLECTOR 40Vp-p (H)
Q702 COLLECTOR 40Vp-p (H)
Q703 COLLECTOR 46Vp-p (H)
BLUE OUT
GRN OUT
RED OUT
B CUTOFF
G CUTOFF
R CUTOFF
B DRIVE
G DRIVE
R DRIVE
VIDEO
NOISE
AGC DET
VIDEO DET
NOISE INVERTER
PIF AMP
RF AGC AMP
AFC DET
VIDEO AMP
SYNC SEP
AFC
HOR.OSC
HOR DRIVE
X-RAY PROTECTOR
VERT OSC
RAMP GEN
VERT DRIVE
CONTRAST AMP
INVERTER AMP
GATE GEN
PESETAL CLAMP
1st BAND PASS AMP
ACC
CHROMA AMP CONTROL
CHROMA TRAP
7INT
KILLER AMP
KILLER IDENT
VCO
MATRIX
APC DET
PAL MATRIX
SECAM CHROMA DEMOD
SECAM CHROMA KILLER
SECAM ORIGINAL
SECAM SW.
CHROMA GATE
IDENT DET
IDENT DEM.
IDENT AMP
KILLER AMP
CLEANING
COLOUR CONTROL & MATRIX
DC CLAMP
SYSTEM SWITCH
CHROMA OUT
R-Y DEMOD.
B-Y DEMOD.
DL AMP
DL.
DISCRI TRANS.
BELL TRANS.
BLANKING AMP
REG.
LIMITTER AMP
FM DET
BUFFER
AUDIO AMP
SURROUND
REGULATOR
CRT SOCKET PB ASS'Y
MAIN PB ASS'Y
IND PB
POWER REG.
STARTER
STARTER DRIVE
POWER_OUT
H OUT
V.OUT
HOR.DRIVE
VIDEO,CHROMA AFC H&V OSC
SECAM,MATRIX & SYSTEM SW
DL P TRANSF.
IF TRANSF.
DISCRI TRANSF.
BAND SWITCH
SIGNAL PB ASS'Y
AUDIO
VIDEO
EARPHONE
IC001 PIN
Q001 Q002 Q003
TP-91
TP-11
TP-16
TP-22
TP-21
TP-43A
TP-43B
TP-46R
TP-46B
TP-33
TP-40
TP-45
TP-44
TP-12K
TP-12A
TP-7B
TP-6
TP-5
TP-4
TP-3
TP-2
TP-1
S001
S002
S101
S201
S202
S301
S302
S501
S901
J001
J002
J201
J202
J301
J302
J601
J602
J603
J701
J702
J703
J901
J902
J903
J904
J905
J906
J907
J908
J909
J910
J911
J912
J913
J914
J915
J916
J917
J918
J919
J920
J921
J922
J923
J924
J925
J926
J927
J928
J929
J930
J931
J932
J933
J934
J935
J936
J937
J938
J939
J940

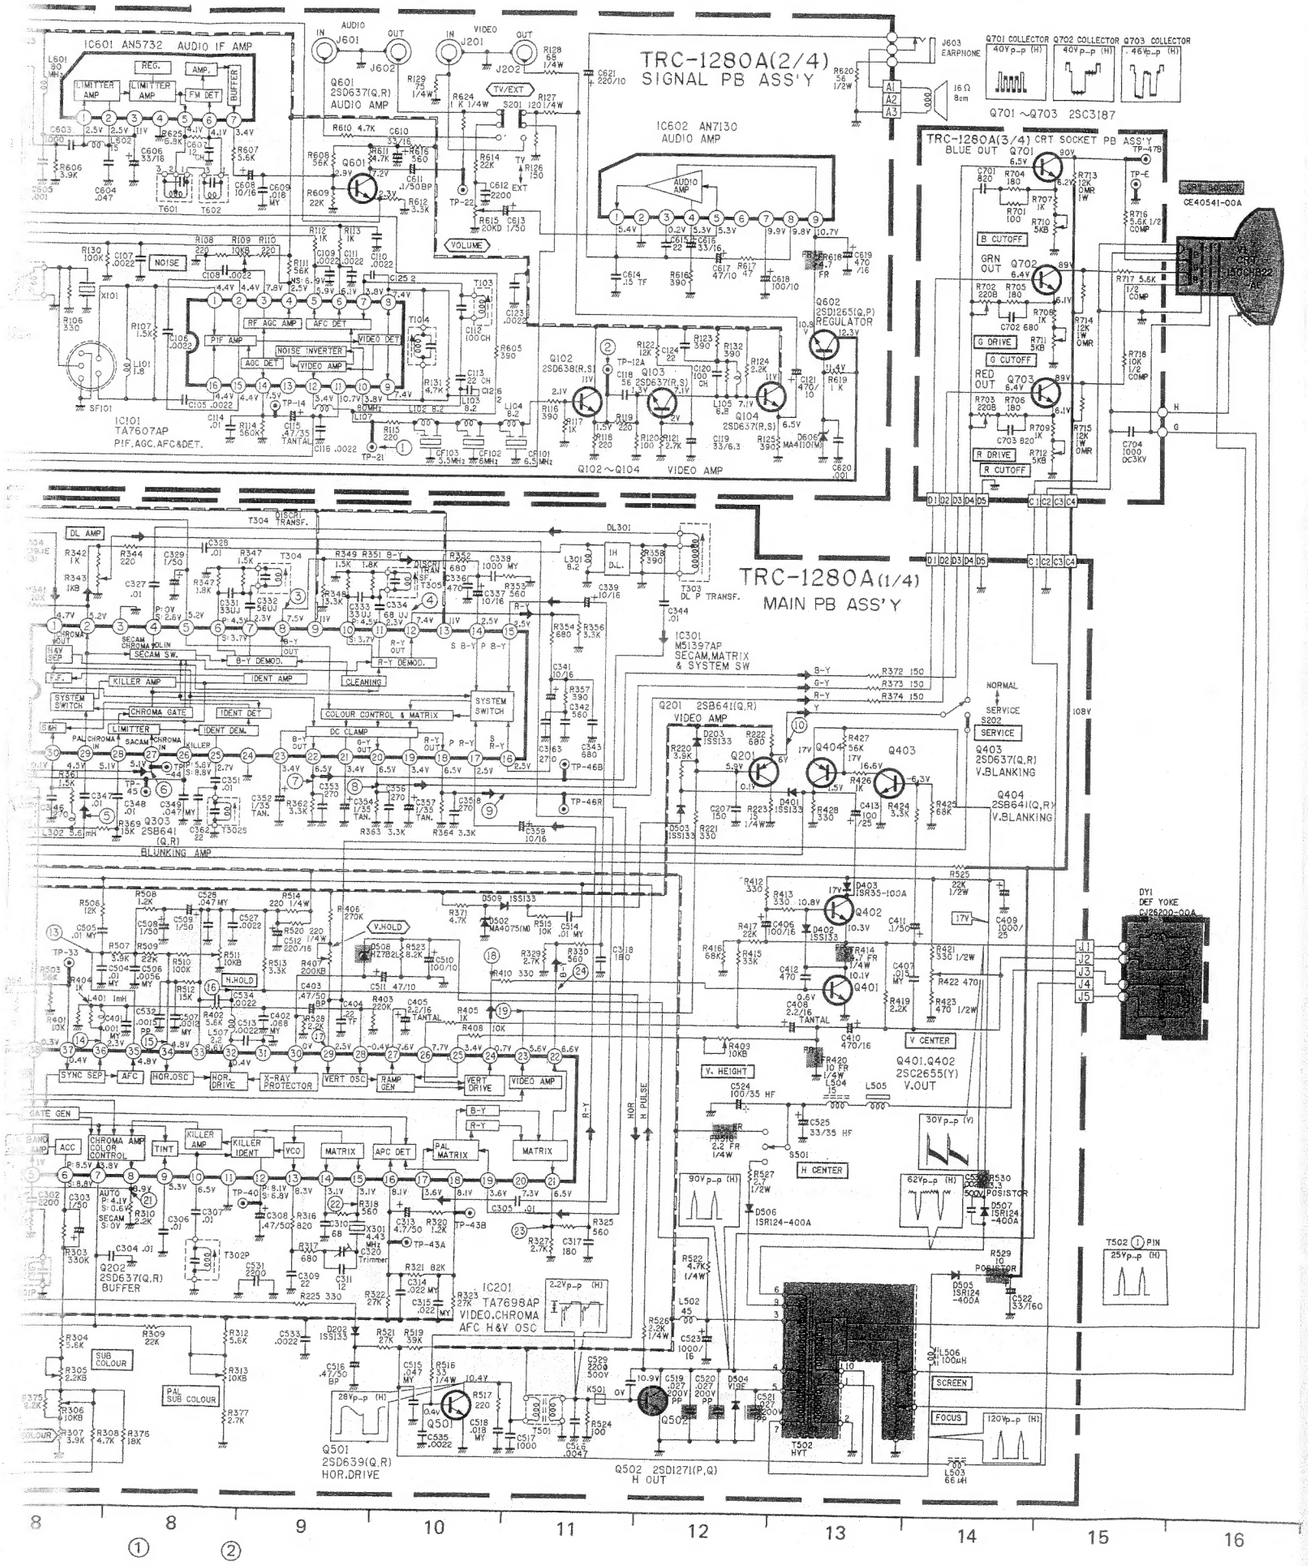

JVC CX-60ME SCHEMATIC DIAGRAM

■ NOTICE

○ Voltage values and waveforms are measured by respectively receiving and displaying on the screen the color bar signals of the PAL and SECAM.

[Voltage value display method]
The voltage values indicated within the circuits denote those obtained when PAL and SECAM color bar signals are received and displayed on the screen. However, as for those points where the voltage values are caused to vary by input signals (PAL/SECAM) discrimination is effected by indicating each voltage value of AUTO (PAL/SECAM) and SECAM.

The measurements were made with each VR under the condition just after the shipment. The figures of the signal circuits may be more or less different after adjustments, so use the figures simply for reference.
Multimeter used
DC 20kΩ/V
Given figures are all DC voltages.
Sweep speed of oscilloscope
H → 20 μS/div. V → 5 mS/div.
Others → sweep speed specified

Since the circuit diagram is a standard one, the circuit and circuit constants may be subject to change for improvement without any notice.

SAFETY

FR (-WW-FR) denotes a fusible resistor which operates as a fuse. When replacing fusible resistors parts indicated with black shading (▓▓) in the circuit diagrams, be sure to ensure safety by using designated parts.
As to other parts too, use designated parts to maintain safety and performance.

INDICATING METHOD OF PARTS SYMBOL NUMBERS

Inside board (Example) TRC-1280A: R1209 → R209
Outside board (Example) R0001 → R01

CIRCUIT DIAGRAM INDICATING METHOD

Resistor

○ Resistance value
Without unit: [Ω] K : [kΩ] M : [MΩ]
○ Rated allowable power
Without indication : 1/6 [W] Others : Indicated
○ Type
Without indication : Carbon resistor
OMR : Oxide metal film resistor
UNF : Unflammable resistor
MFR : Metal film resistor
FR : Fusible resistor
* Composition resistor 1/2 [W] is indicated as 1/2S or Comp.

Capacitor

○ Capacitance
Above 1 [pF] : Below 1 [μF]
○ Pressure tightness
Without indication : DC 50 [V]
Others : DC pressure-tight [V]
AC indicated : AC pressure-tight [V]
○ Indications for electrolitic capacitors are as follows.
(Example)
47/50 → capacitance [μF] /pressuretightness [V]
○ Type
Without indication : Ceramic capacitor
MY : Mylar capacitor
MM : Metalized mylar capacitor
PP : Polypropylene capacitor
MPP : Metalized polypropylene capacitor
NP : Nonpolar electrolytic capacitor
BP : Bipolar electrolytic capacitor
TAN. : Tantalum capacitor

Coil

Without unit : [μH]

Test point & GND

: Test point by miniature GT pin
: Primary-side ground
: Secondary-side ground

Connection method

: Connector, , : Receptacle
○ ◯: Wrapping or soldering
* Each voltage reading specified.

■ BASINGS OF TRANSISTORS & ICs

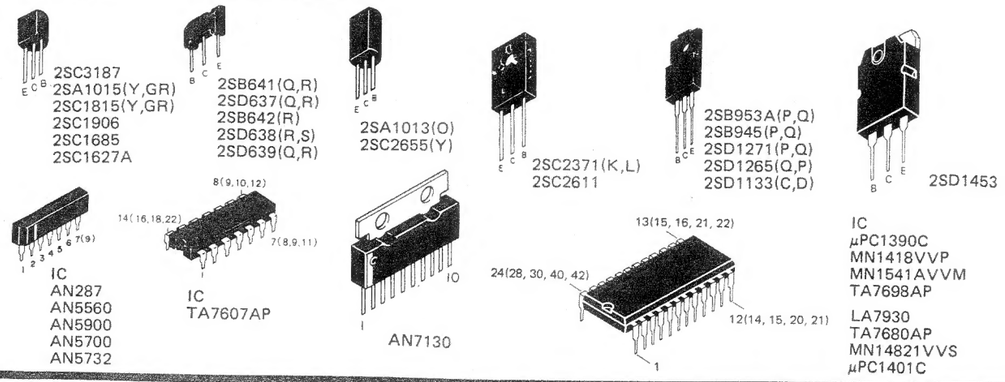

■ ALIGNMENT LOCATIONS

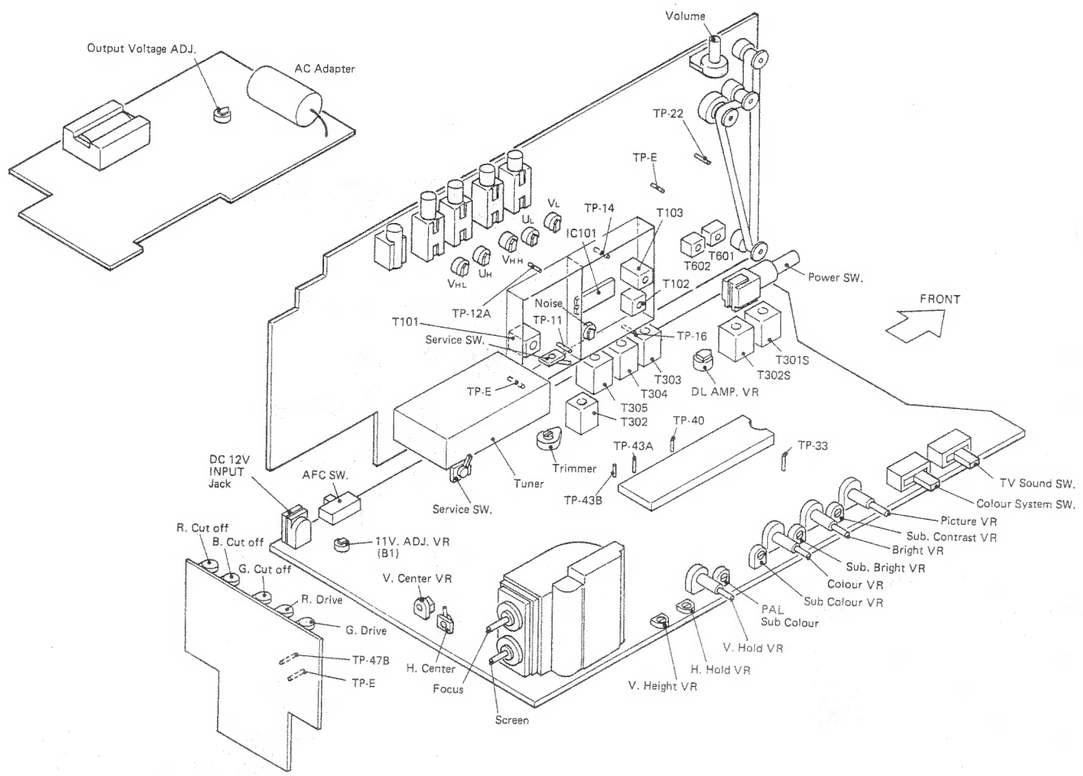

■ PARTS LIST (Shaded parts in the schematic diagram)

Symbol No.	Part No.	Part Name
TRC-1280A (MAIN P.B. ASS'Y)		
R1529	CE40731-100	Posistor
1530	" -3R3	"
1906	QRV141F-2701Y	MF R
1908	" -2701Y	"
C1519	QFP32DJ-273M	PP Cap.
1520	" -273M	"
1521	" -273M	"
FR1201	QRZ0054-4R7M	F R
1414	" -4R7M	"
1420	" -100M	"
1518	" -2R2M	"
1618	" -4R7M	"
Q1502	2SD1271(P,Q)	Si. Transistor
D1508	HZ7B2L	Zener Diode
1903	MA4056(H)	"
T1502	CJ39591-001	H V Module
F1901	QMF51E2-2R0S	Fuse
	CE40541-00A	CRT Socket

Symbol No.	Part No.	Part Name
TRC-9280A (POWER P.B. ASS'Y)		
C9001	QFZ9017-104M	MM Cap.
9005	QCZ9011-222M	C Cap.
9006	" -222M	"
9007	QFZ9017-104M	MM Cap.
9009	QCZ9011-222M	C Cap.
9010	" -222M	"
9029	" -103M	"
S9001	CEX40376-001	Seesaw Switch
T9001	CE40710-00A	Line Filter
9002	A76567-MA	P. Drive Transf.
9003	CE40638-00A	Switching Transf.
F9001	QMF51E2-2R5S	Fuse
R9003	CE40643-001	Posistor
9038	QRZ0057-685	C R
OUTSIDE OF THE P.B. ASS'Ys		
V01	150CHB22-AE	Picture Tube
DY01	CJ26200-00A	Def. Yoke Ass'y
	QMP4018-200R	Power Cord

MAIN PB BACK PATTERN (CX-60ME)

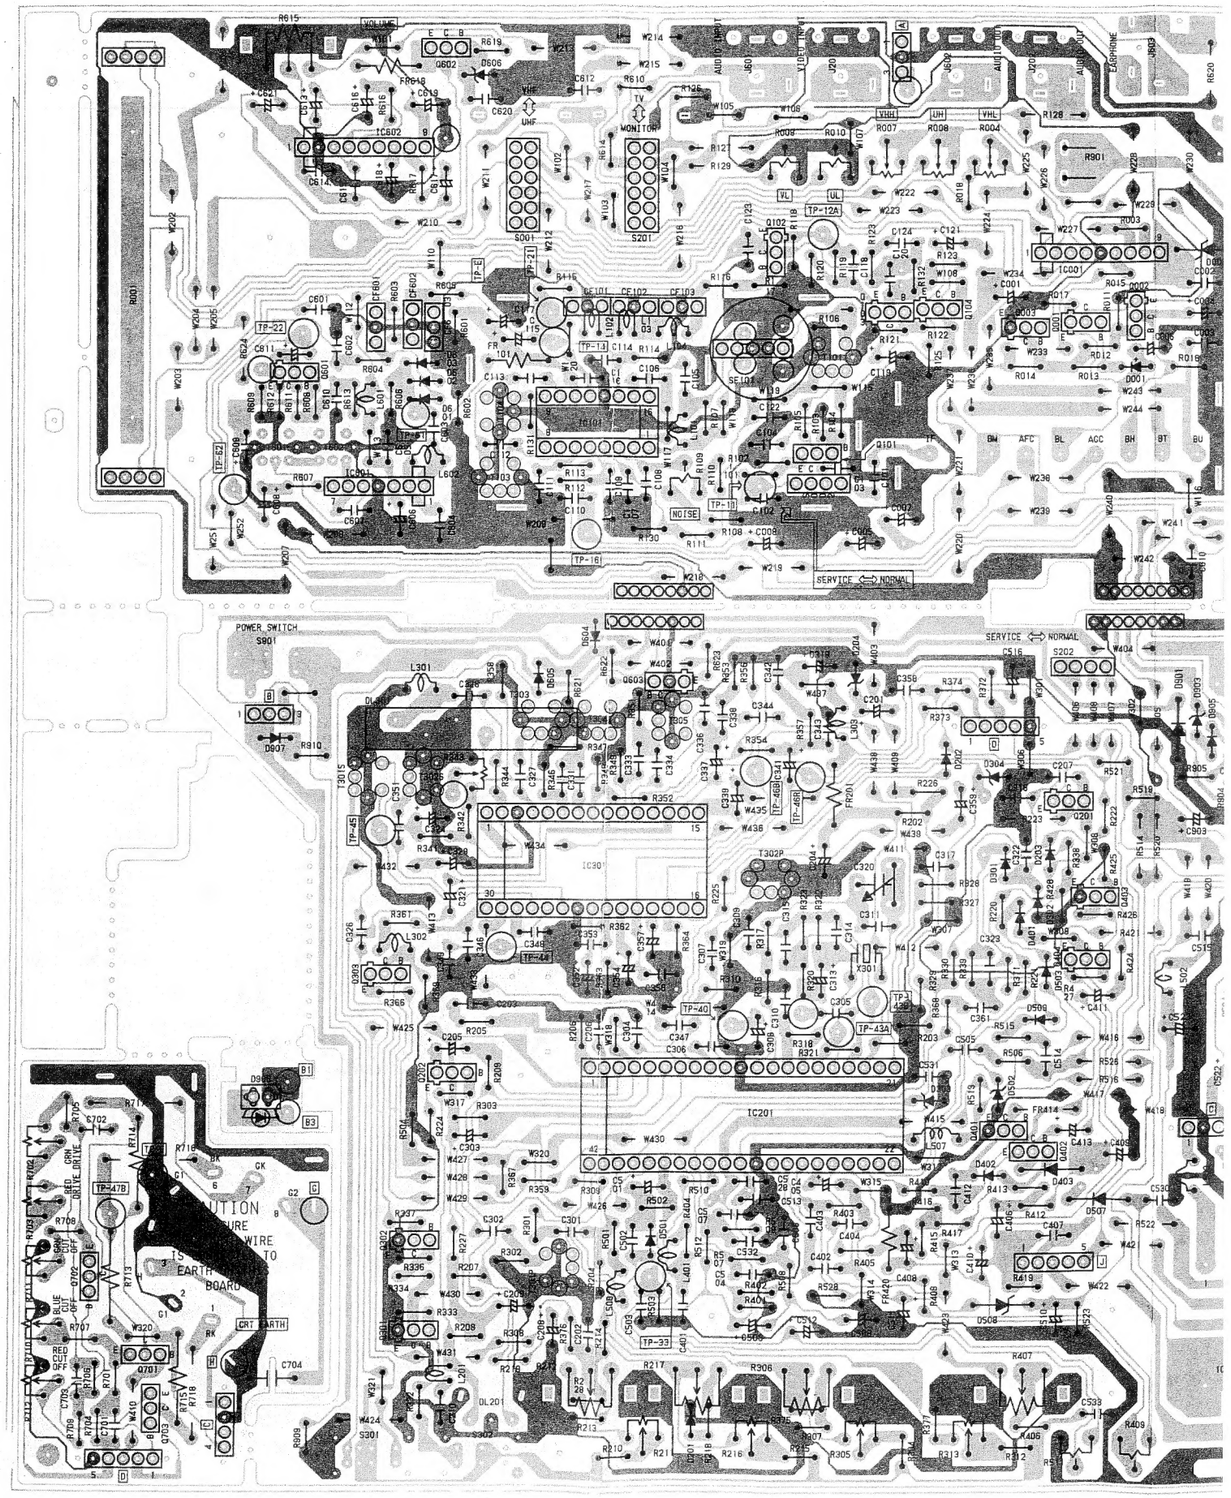

MAIN PB BACK PATTERN (CX-60ME)

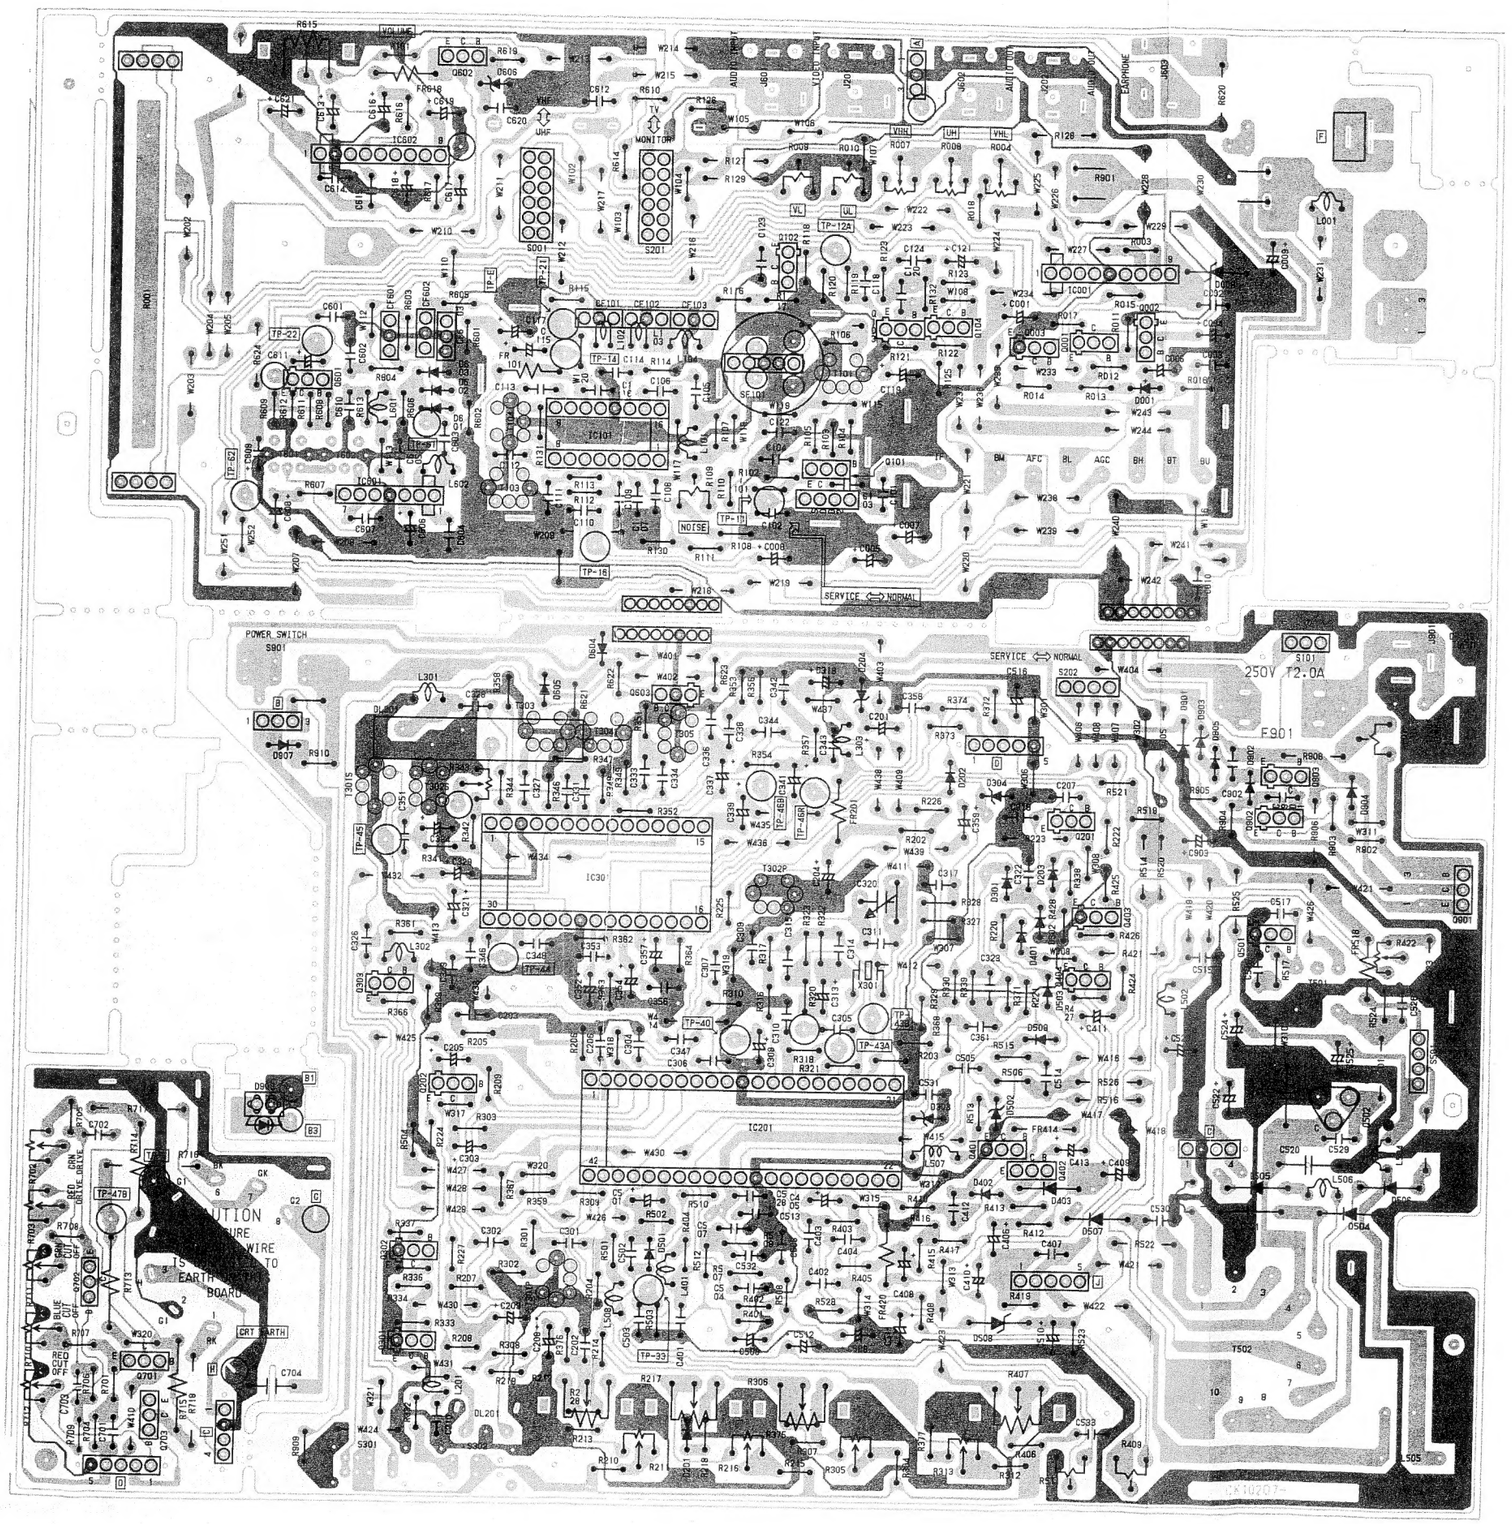

POWER PB BACK PATTERN (AA-60ME)